


SMA 3 Way LC Power Divider, RPDLCM5F1S3 5-1000MHz, 1W

Dimensions(mm) Tolerance \pm 1%

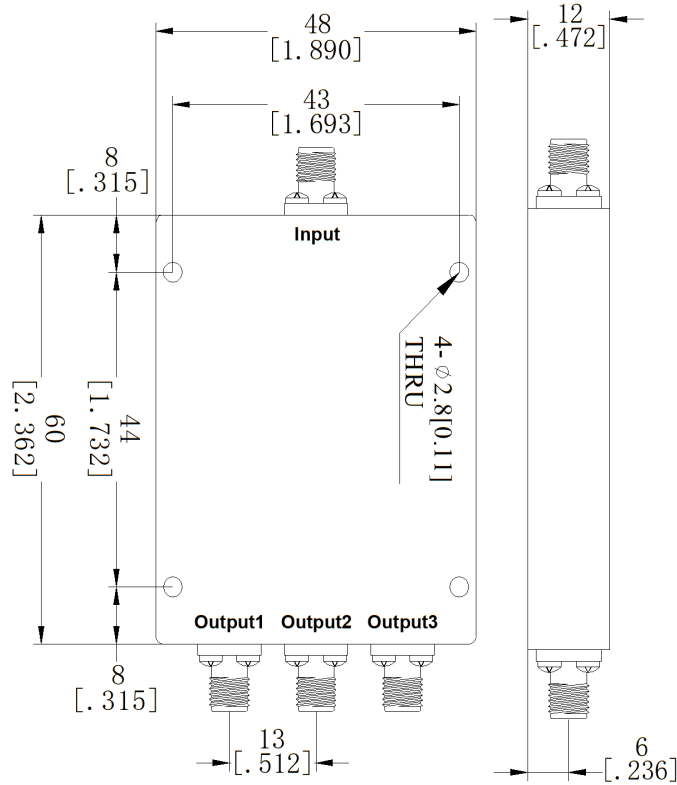

Electrical & Environmental

Frequency Range	5-1000MHz	Impedance	50 Ohm
Input Port VSWR	1.7 max (Typ.1.28)	Output Port VSWR	1.4 max (Typ.1.19)
Insertion Loss	1.7dB max (Excluding theoretical loss未含理论损耗4.8dB)		
Isolation	18dB min (Typ.30dB)		
Amplitude Balance	\pm 0.4dB	Phase Balance	\pm 6°
Input Avg Power	1 Watts max @25°C		
Operating Temp	-45°C ~ +85°C		

Mechanical & Product Information

Product Number	RPDLCM5F1S3	Way	3
Connector	SMA Female	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Black paint		
Dimensions	60×48×12mm	Net Weight	About 85.0g