


SMA 3 Way Resistive Power Divider, RPDR3S3 DC-3GHz, 2W

Dimensions(mm) Tolerance \pm 1%

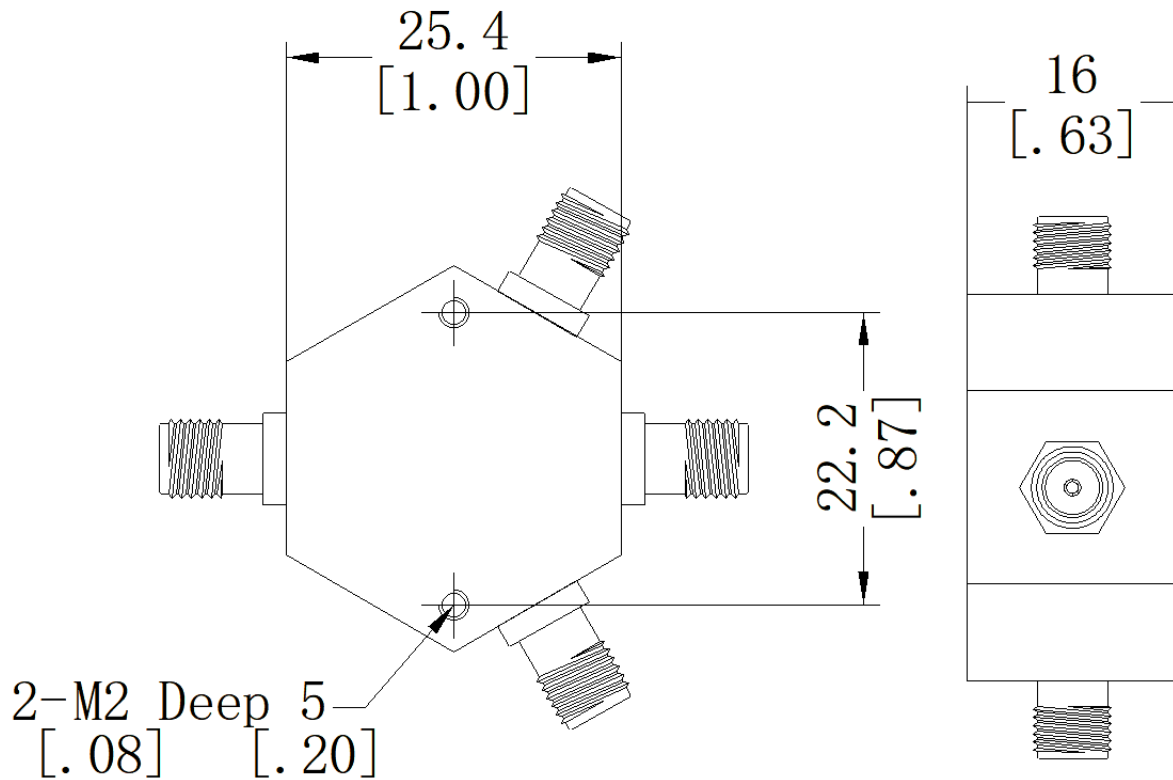

Electrical & Environmental

Frequency Range	DC-3GHz	Impedance	50 Ohm
Input Port VSWR	1.25 max (Typ.1.14)	Output Port VSWR	1.25 max (Typ.1.14)
Insertion Loss	10dB max		
Isolation	8.9dB min		
Amplitude Balance	\pm 0.6dB	Phase Balance	
Input Avg Power	2 Watts max @25°C (Derate linearly to 0.2 Watt at 100°C)		
Operating Temp	-35°C ~ +75°C		

Mechanical & Product Information

Product Number	RPDR3S3	Way	3
Connector	SMA Female	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Black paint		
Dimensions	25.4×29.3×16mm	Net Weight	About 33.0g

SMA 3 Way Resistive Power Divider, RPDR3S3 DC-3GHz, 2W

Typical Test Data

