


## N 12 Way Resistive Power Divider, RPDR4N12 DC-4GHz, 2W

Dimensions(mm) Tolerance±1%

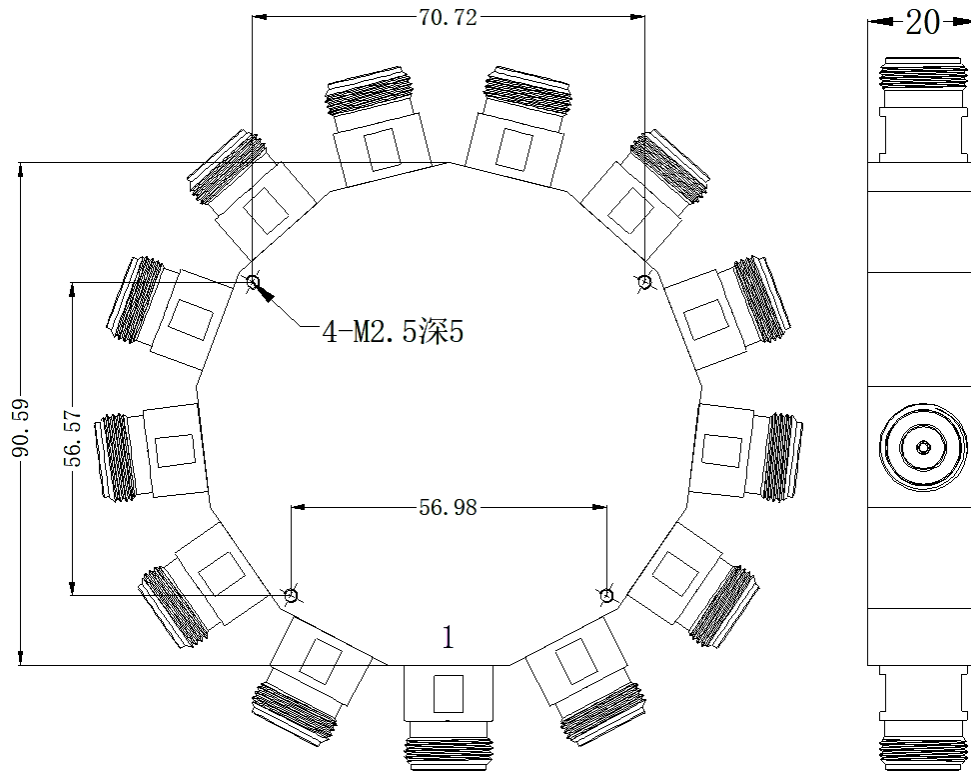

### Electrical & Environmental

Frequency Range	DC-4GHz	Impedance	50 Ohm
Input Port VSWR	1.5 max (Typ.1.19)	Output Port VSWR	1.5 max (Typ.1.18)
Insertion Loss	23.6dB max		
Isolation	20dB min		
Amplitude Balance	± 2.0dB	Phase Balance	
Input Avg Power	2 Watts max @25°C (Derate linearly to 0.2 Watt at 100°C)		
Operating Temp	-35°C ~ +75°C		

### Mechanical & Product Information

Product Number	RPDR4N12	Way	12
Connector	N Female	Connector Body	Ternary alloy plated brass
Center Contact	Gold plated beryllium copper		
Housing	Sandblasting natural color conductive oxide		
Dimensions	90.59×90.59×20mm	Net Weight	-