


SMA 8 Way Resistive Power Divider, RPDR6S8 DC-6GHz, 2W

Dimensions(mm) Tolerance $\pm 1\%$

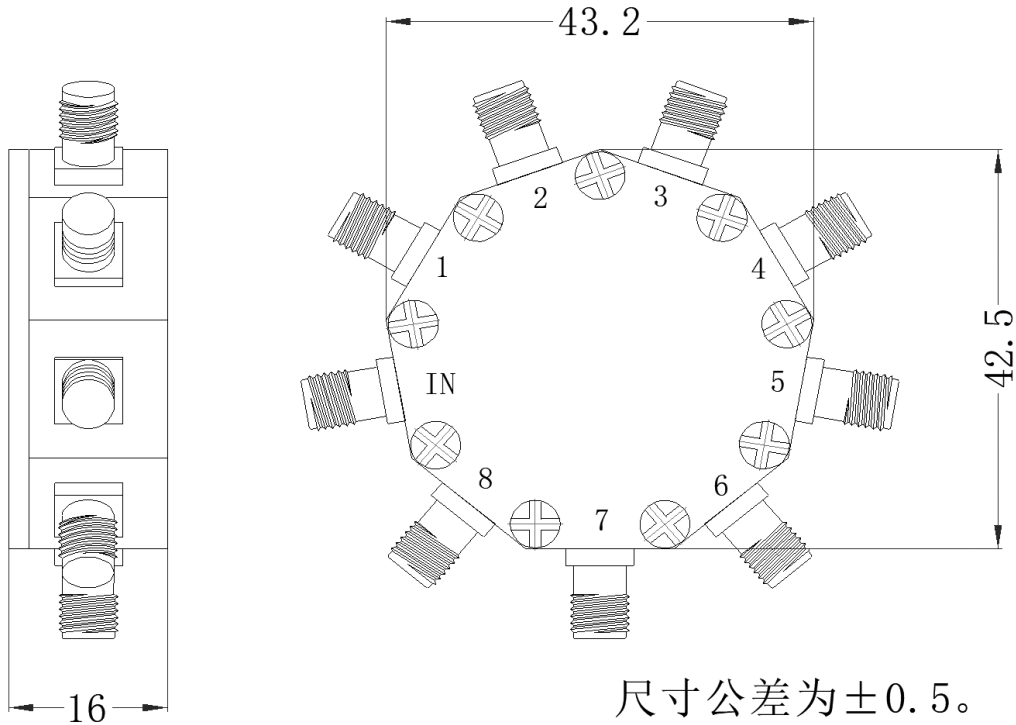

Electrical & Environmental

Frequency Range	DC-6GHz	Impedance	50 Ohm
Input Port VSWR	1.5 max	Output Port VSWR	1.5 max
Insertion Loss	24dB max		
Isolation	18dB min		
Amplitude Balance	± 1.5 dB	Phase Balance	
Input Avg Power	2 Watts max @25°C (Derate linearly to 0.2 Watt at 100°C)		
Operating Temp	-35°C ~ +75°C		

Mechanical & Product Information

Product Number	RPDR6S8	Way	8
Connector	SMA Female	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Sandblasting natural color conductive oxidation		
Dimensions	-	Net Weight	-