


L29(DIN 7/16)WR975(BJ9) 16 Way Waveguide Combiner, RWCD975D-16

885-945MHz, W, UDR9 Flange

Dimensions(mm) Tolerance $\pm 1\%$

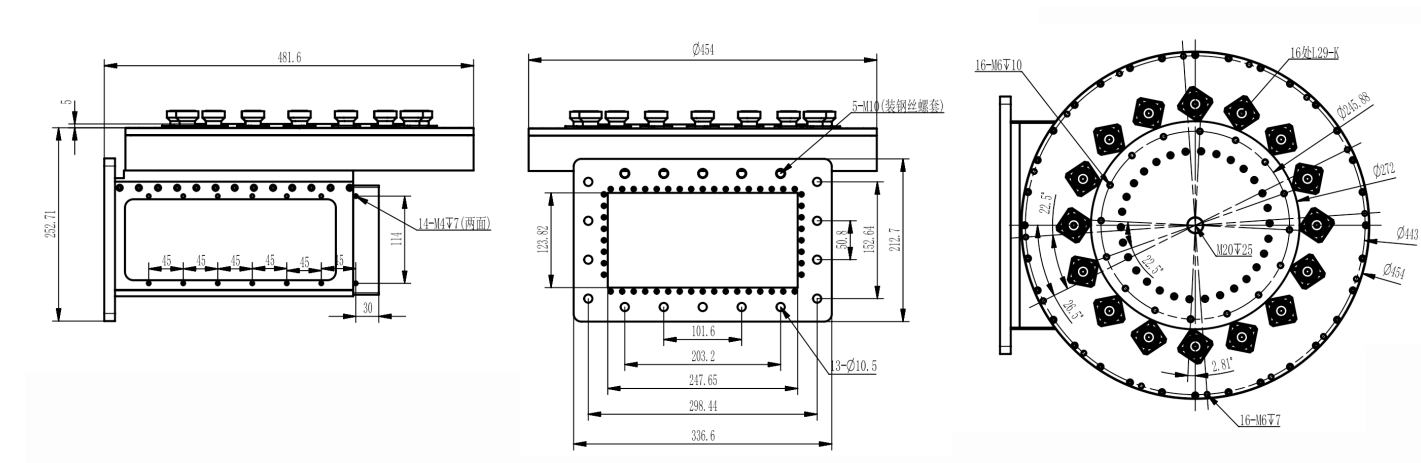

Electrical & Environmental

Frequency Range	885-945MHz	Impedance	50 Ohm
Input Port VSWR	1.3 max	Output Port VSWR	1.3 max
Insertion Loss	00.6dB max		
Amplitude Balance	± 0.3 dB	Phase Balance	$\pm 5^\circ$
Operating Temp	-35°C ~ +75°C		

Mechanical & Product Information

Product Number	RWCD975D-16	Way	16
Connector	L29(DIN 7/16) Female	Connector Body	Ternary alloy plated brass
Waveguide	WR975(BJ9), UDR9 Flange	Waveguide Body	Aluminum, grey painted
Center Contact	Aluminum, electric conductive oxidation		
Housing	Grey paint		
Dimensions	481.6×454×252.71mm	Net Weight	-