WRD350 2 Way Waveguide Magic Tee, RWDMT350
3.5-8.2GHz, W, FPWRD350 Flange

Dimensions(mm) Tolerance±1%

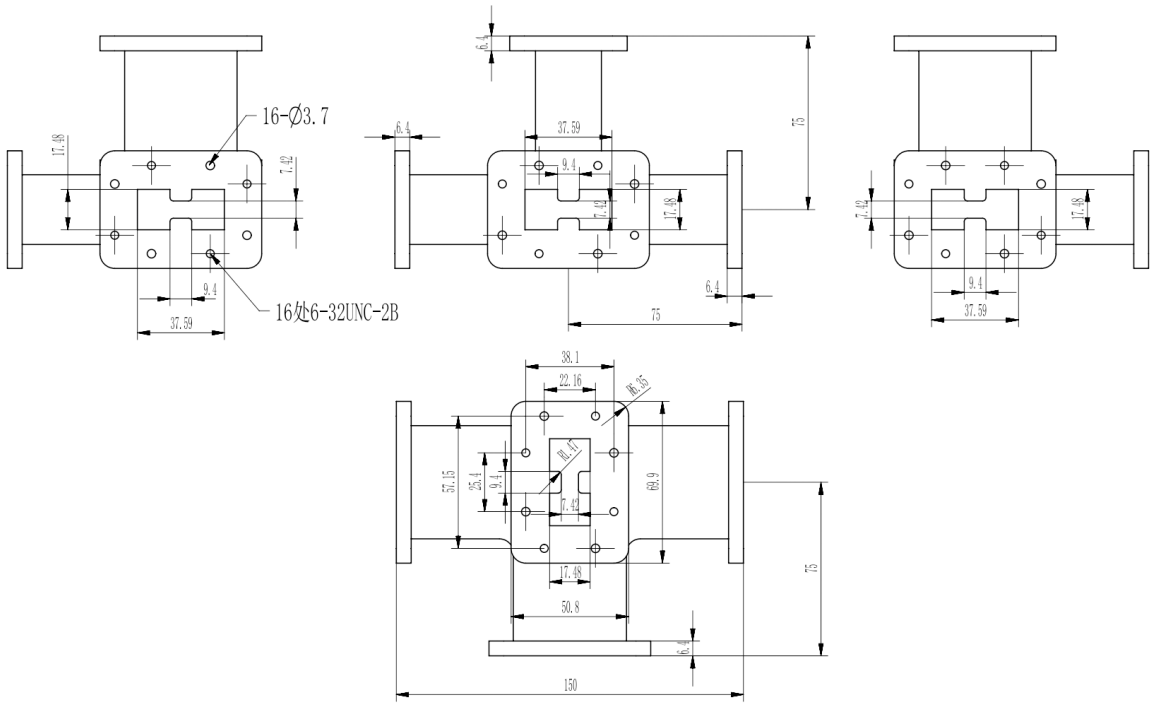

Electrical & Environmental

Frequency Range	3.5-8.2GHz		
Input Port VSWR	1.5 Max	Output Port VSWR	1.5 Max
Insertion Loss	0.60dB Max (Does not contain theory loss 3.00dB)		
Isolation	30dB min (E-H)；14dB(Balance arm)		
Operating Temp	-40°C ~ +70°C		

Mechanical & Product Information

Product Number	RWDMT350	Way	2
Waveguide	WRD350, FPWRD350 Flange	Waveguide Body	Aluminum, grey painted
Center Contact	Aluminum, electric conductive oxidation		
Housing	Grey paint		
Dimensions	150×75×75mm	Net Weight	-