


WRD350 2 Way Waveguide Power Divider HT, RWDPD350HT-2 4-8GHz, W, FPWRD350 Flange, P-Grade

Dimensions(mm) Tolerance $\pm 1\%$

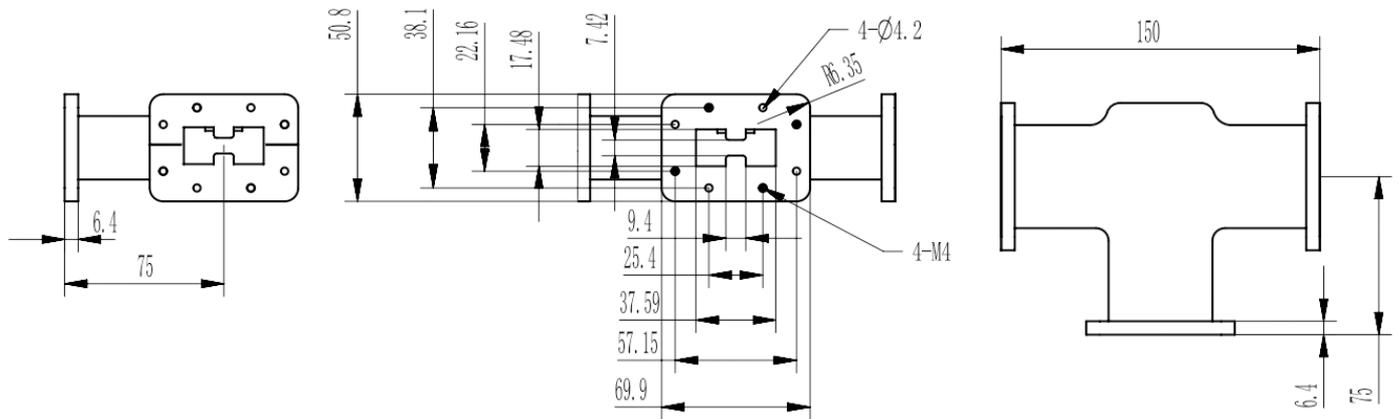

Electrical & Environmental

Frequency Range	4-8GHz		
Input Port VSWR	1.5 Max	Output Port VSWR	None
Insertion Loss	dB Max		
Amplitude Balance	± 0.5 dB	Phase Balance	$\pm 5^\circ$
Operating Temp	-55°C ~ +85°C		

Mechanical & Product Information

Product Number	RWDPD350HT-2, P-Grade	Way	2
Waveguide	WRD350, FPWRD350 Flange	Waveguide Body	Aluminum, grey painted
Center Contact	Aluminum, silver plated		
Housing	Grey paint		
Dimensions	150×110×50.8mm	Net Weight	-