




WRD500 4 Way Waveguide Power Divider ET, RWDPD500ET-4
6-18GHz, W, FPWRD500 Flange, P-Grade

Dimensions(mm) Tolerance±1%

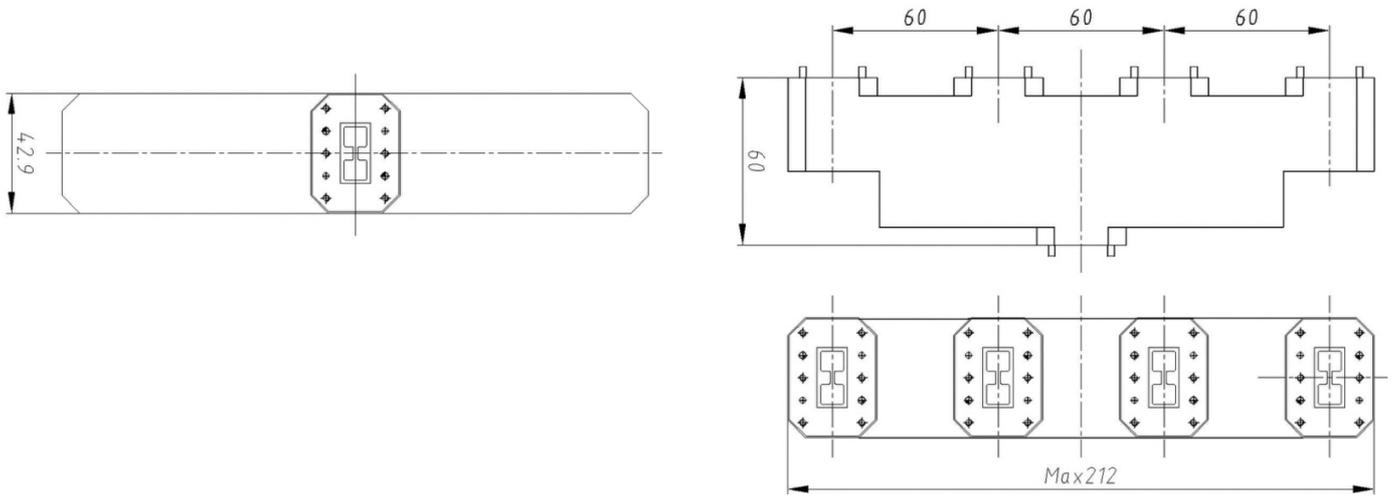

Electrical & Environmental

Frequency Range	6-18GHz		
Input Port VSWR	1.7 Max	Output Port VSWR	None
Insertion Loss	0.60dB Max		
Amplitude Balance	± 0.3dB	Phase Balance	±3°
Operating Temp	-55°C ~ +85°C		

Mechanical & Product Information

Product Number	RWDPD500ET-4, P-Grade	Way	4
Waveguide	WRD500, FPWRD500 Flange	Waveguide Body	Aluminum, grey painted
Center Contact	Aluminum, silver plated		
Housing	Grey paint		
Dimensions	212×60×42.9mm	Net Weight	-



WRD500 4 Way Waveguide Power Divider ET, RWDPD500ET-4 6-18GHz, W, FPWRD500 Flange, P-Grade

Typical Test Data

