


## WR229(BJ40) 2 Way Waveguide Magic Tee, RWMT229 3.22-4.9GHz(20%), W, UDR40 Flange

### Dimensions(mm) Tolerance $\pm 1\%$

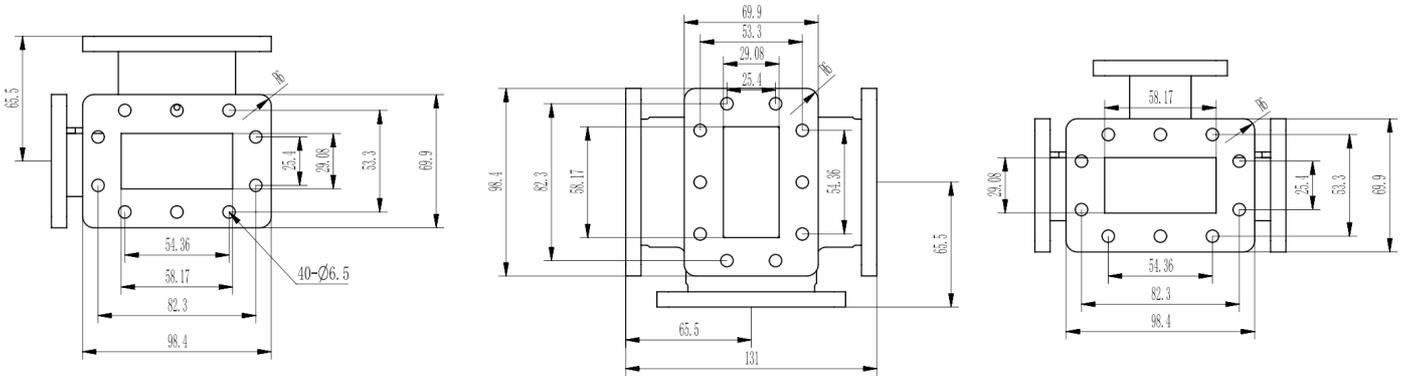

### Electrical & Environmental

Frequency Range	3.22-4.9GHz(20%)		
Input Port VSWR	1.2 Max	Output Port VSWR	1.2 Max
Insertion Loss	0.40dB Max		
Isolation	18dB min		
Operating Temp	-40°C ~ +70°C		

### Mechanical & Product Information

Product Number	RWMT229	Way	2
Waveguide	WR229(BJ40), UDR40 Flange	Waveguide Body	Aluminum, grey painted
Center Contact	Aluminum, electric conductive oxidation		
Housing	Grey paint		
Dimensions	131×65.5×98.4mm	Net Weight	-