


## WR284(BJ32) 2 Way Waveguide Magic Tee, RWMT284 2.8-3.5GHz, 1500W, UDR32 Flange

### Dimensions(mm) Tolerance $\pm 1\%$

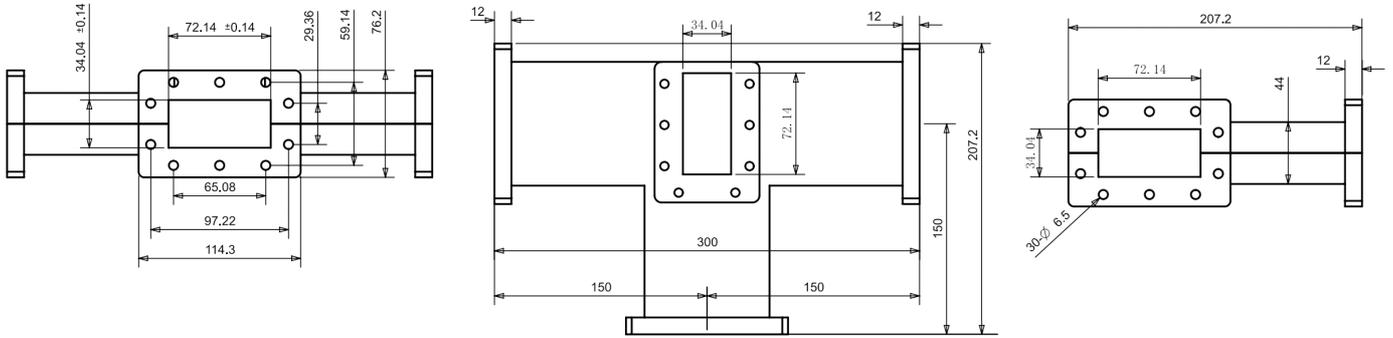

### Electrical & Environmental

Frequency Range	2.8-3.5GHz		
Input Port VSWR	1.2 Max	Output Port VSWR	1.2 Max
Insertion Loss	dB Max		
Isolation	20dB min		
Input Avg Power	1500 Watts Max @25°C (Derate linearly to 150 Watt at 100°C)		
Operating Temp	-40°C ~ +70°C		

### Mechanical & Product Information

Product Number	RWMT284	Way	2
Waveguide	WR284(BJ32), UDR32 Flange	Waveguide Body	Aluminum, grey painted
Center Contact	Aluminum, electric conductive oxidation		
Housing	Grey paint		
Dimensions	300×207.2×76.2mm	Net Weight	-