


WR28(BJ320) 2 Way Waveguide Magic Tee, RWMT28 26.3-40GHz(30%), W, UBR320 Flange

Dimensions(mm) Tolerance $\pm 1\%$

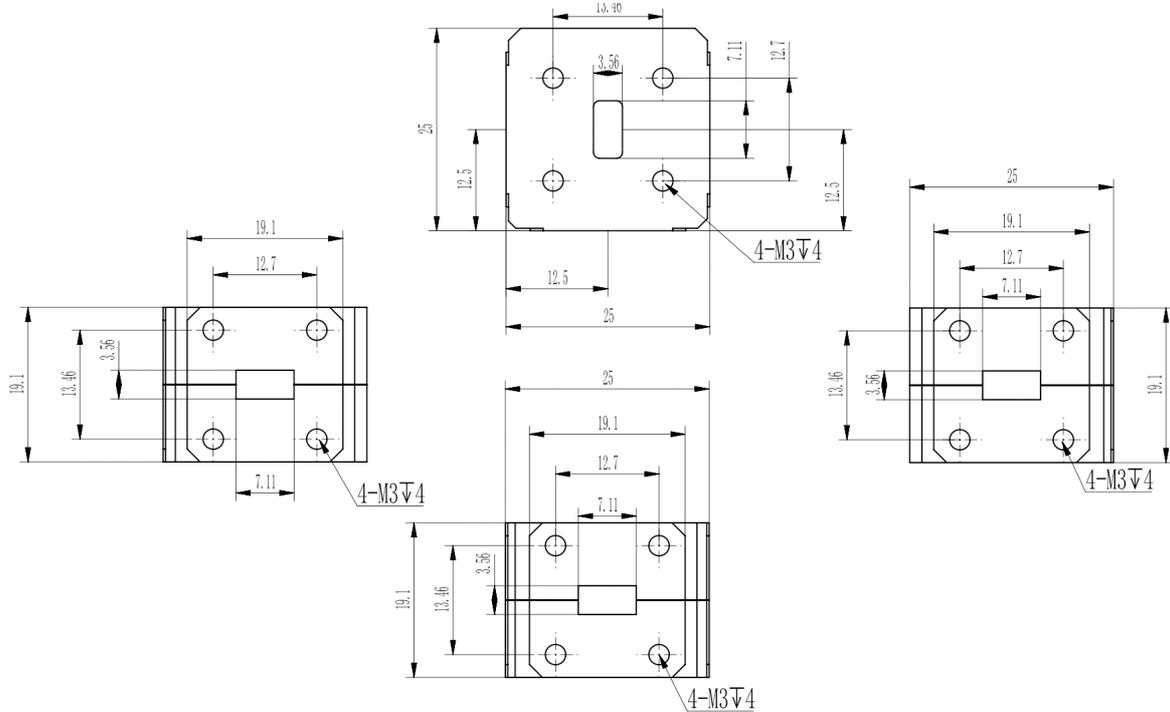

Electrical & Environmental

Frequency Range	26.3-40GHz(30%)		
Input Port VSWR	1.2 Max	Output Port VSWR	1.2 Max
Insertion Loss	0.30dB Max		
Isolation	20dB min		
Operating Temp	-40°C ~ +70°C		

Mechanical & Product Information

Product Number	RWMT28	Way	2
Waveguide	WR28(BJ320), UBR320 Flange	Waveguide Body	Copper, grey painted
Center Contact	Copper, pickling		
Housing	Grey paint		
Dimensions	25×25×19.1mm	Net Weight	-