


WR340(BJ26) 2 Way Waveguide Magic Tee Power Divider, RWMT340W500 2450±30MHz, 500W, UDR26 Flange

Dimensions(mm) Tolerance±1%

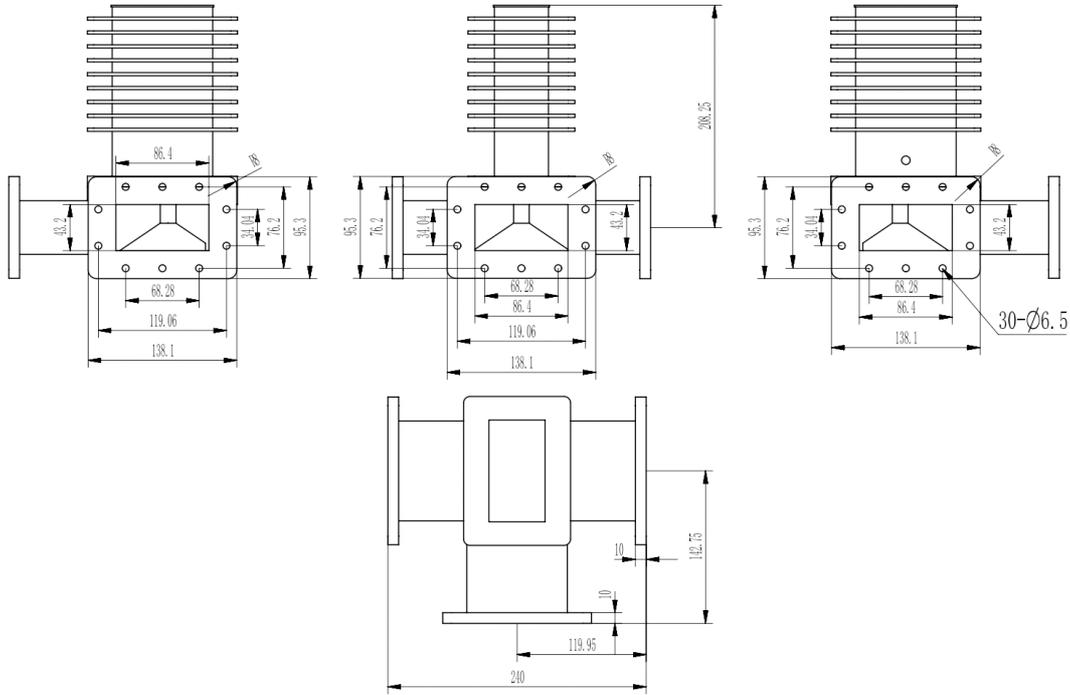

Electrical & Environmental

Frequency Range	2450±30MHz		
Input Port VSWR	1.2 Max	Output Port VSWR	1.2 Max
Insertion Loss	0.20dB Max		
Isolation	20dB min		
Input Avg Power	500 Watts Max @25°C (Derate linearly to 50 Watt at 100°C)		
Operating Temp	-40°C ~ +70°C		

Mechanical & Product Information

Product Number	RWMT340W500	Way	2
Waveguide	WR340(BJ26), UDR26 Flange	Waveguide Body	Aluminum, grey painted
Center Contact	Aluminum, electric conductive oxidation		
Housing	Grey paint		
Dimensions	240×208.25×142.75mm	Net Weight	-