


WR12(BJ740) 2 Way Waveguide Power Divider, RWPD12T-2 60.5-91.9GHz, W, FUGP740 Flange, P-Grade

Dimensions(mm) Tolerance $\pm 1\%$

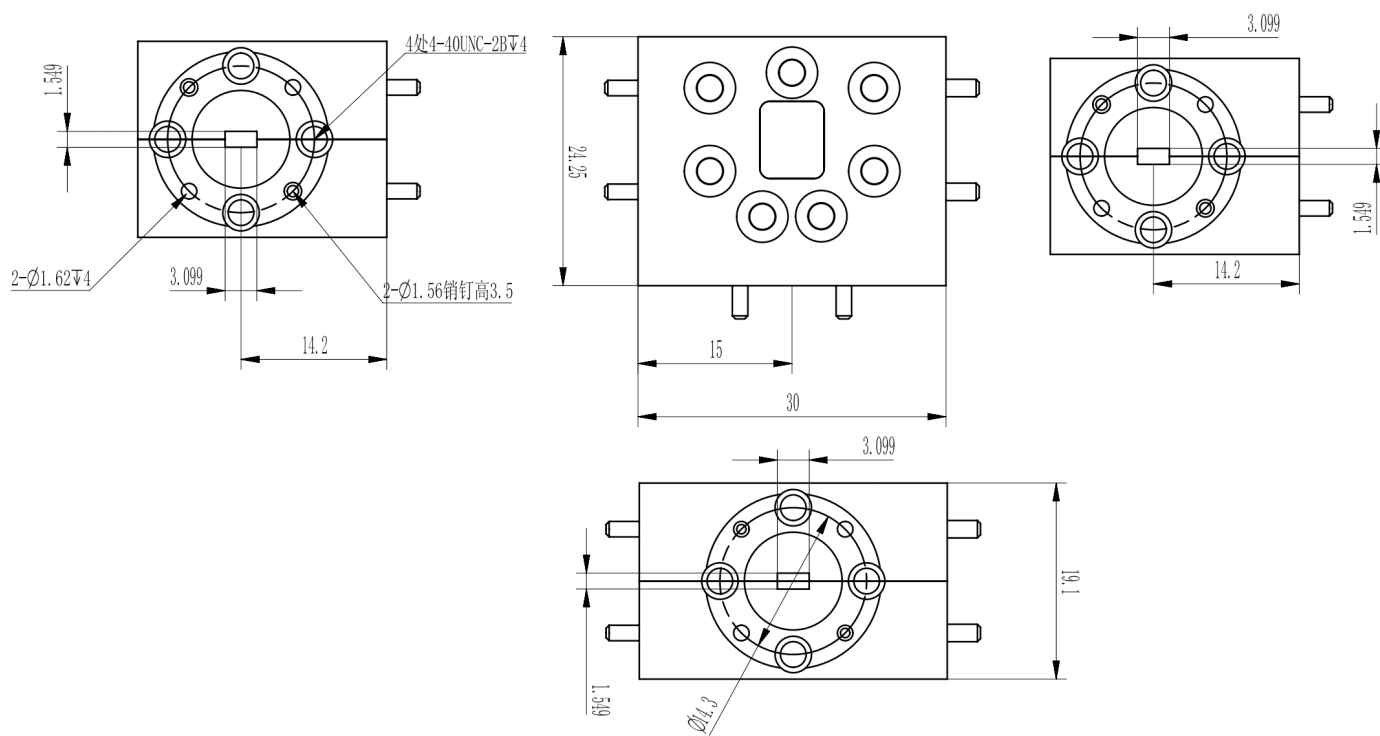

Electrical & Environmental

Frequency Range	60.5-91.9GHz	Impedance	50 Ohm
Input Port VSWR	1.25 max	Output Port VSWR	1.25 max
Insertion Loss	00.5dB max		
Isolation	20dB min		
Operating Temp	-55°C ~ +85°C		

Mechanical & Product Information

Product Number	RWPD12T-2, P-Grade	Way	2
Waveguide	WR12(BJ740), FUGP740 Flange	Waveguide Body	Copper, gold plated
Center Contact	Copper, gold plated		
Housing	Gold plated		
Dimensions	30×24.5×19.1mm	Net Weight	-