


## WR15(BJ620) 2 Way Waveguide Power Divider ET, RWPD15ET-2 50-75GHz, W, UG-385/U Flange, P-Grade

Dimensions(mm) Tolerance $\pm 1\%$

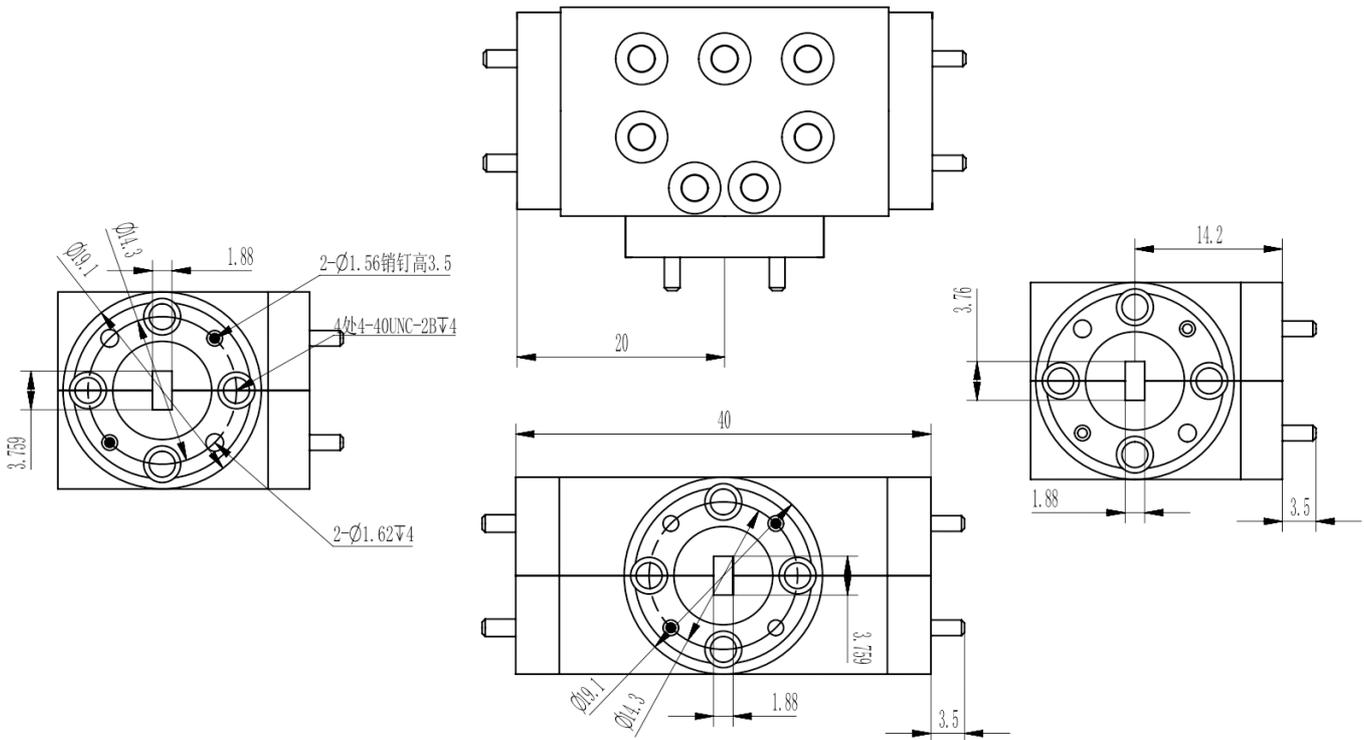

### Electrical & Environmental

Frequency Range	50-75GHz	Impedance	50 Ohm
Input Port VSWR	1.3 Max	Output Port VSWR	None
Insertion Loss	0.50dB Max		
Amplitude Balance	$\pm 0.5$ dB	Phase Balance	$\pm 5^\circ$
Operating Temp	-55°C ~ +85°C		

### Mechanical & Product Information

Product Number	RWPD15ET-2, P-Grade	Way	2
Waveguide	WR15(BJ620), UG-385/U Flange	Waveguide Body	Copper, gold plated
Center Contact	Copper, gold plated		
Housing	Gold plated		
Dimensions	40×24.2×19.1mm	Net Weight	-