




WR229(R40) Waveguide Calibration Kits, **RWCK229S** 3.22-4.9GHz, SMA Female, UDR40 Flange

Dimensions(mm) Tolerance $\pm$ 1%

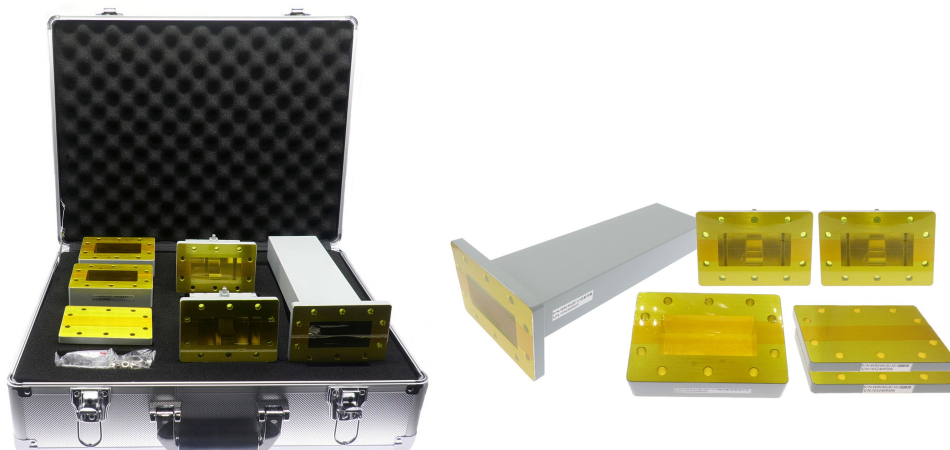

Electrical & Environmental

Frequency Range	3.22-4.9GHz
Temperature Range	-40°C~+85°C

Mechanical & Product Information

Product Number	RWCK229S
Product Type	Waveguide Calibration Kits
Connector	SMA Female
Waveguide 1	WR229(R40), UDR40 Flange
Waveguide Body	Aluminum, grey painted
Center Contact	Aluminum, electric conductive oxidation

RWCK229S List of Calibration Kit

Product Name	RFTOP P/N	VSWR	Qty
波导同轴转换器	RWR229S	1.2 Max	2
匹配负载	RWT229	1.03 Max	1
1/4波定长块	RWGQL229	-	2
短路块	RWGSC229	-	2
配套紧固螺丝	M6-25	-	30
包装箱	定制款	-	1

Notes

1、Click on the list model to view the specification sheet for the model product.