


## WRD1800 Straight Waveguide, RWDG1800-L 18-40GHz,

### Dimensions(mm) Tolerance $\pm 1\%$

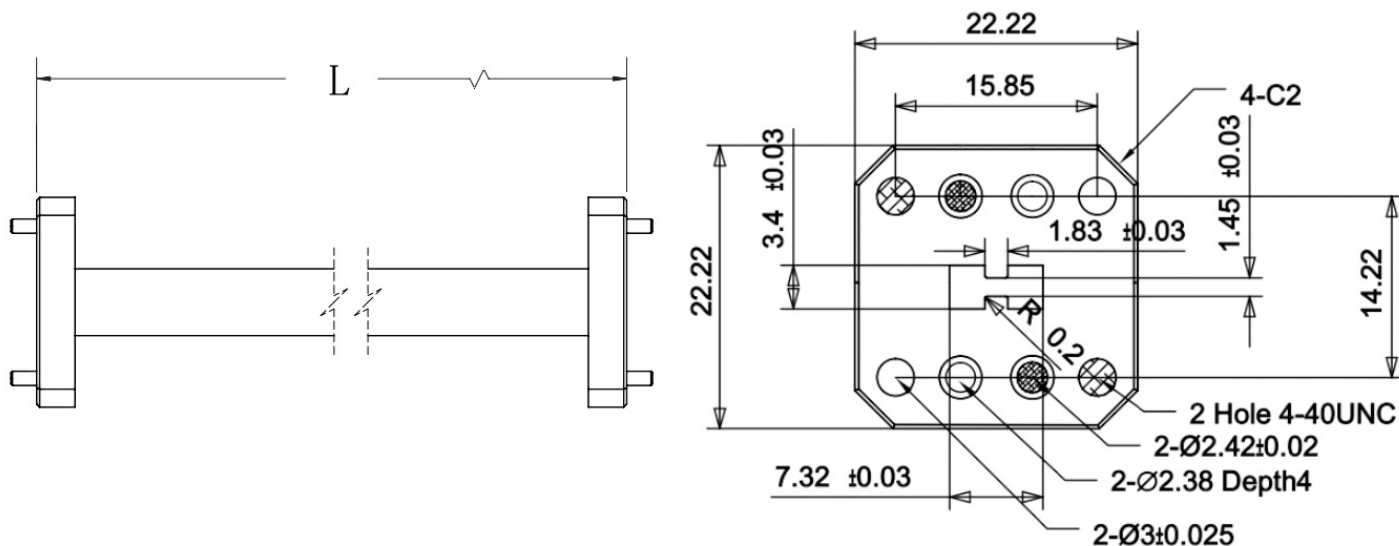

### Electrical & Environmental

Frequency Range	18-40GHz
Temperature Range	-40°C~+70°C

Product Selection, Customizable			
RFTOP P/N	L(mm)	L2(mm)	IL(dB)

### Mechanical & Product Information

Product Number	RWDG1800-L
Product Type	Straight Waveguide
Waveguide 1	WRD1800,
Waveguide 2	WRD1800,
Waveguide Body	Aluminum, grey painted
Center Contact	Aluminum, electric conductive oxidation

#### Notes

1. Customized services include: length and structure and flange type.
2. The marked loss is the theoretical estimated loss, for reference only, the specific product after processing test shall prevail.
3. Please refer to the second page of the specification of typical electrical performance measured curve.