


WRD350 Flange Piece, RWDGF350-L 3.5-8.2GHz, FPWRD350 Flange

Dimensions(mm) Tolerance ± 1%

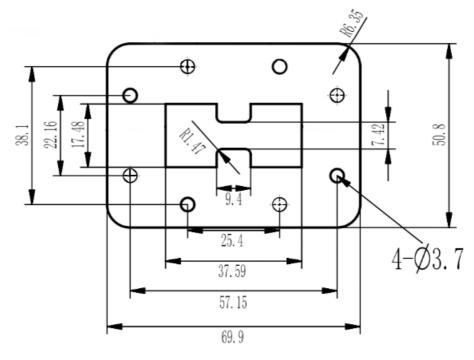

Electrical & Environmental

| Frequency Range | 3.5-8.2GHz |
|-------------------|-------------|
| Temperature Range | -40°C∼+70°C |

Mechanical & Product Information

| Product Number | RWDGF350-L | |
|----------------|---|--|
| Product Type | Flange Piece | |
| Waveguide 1 | WRD350, FPWRD350 Flange | |
| Waveguide 2 | WRD350, FPWRD350 Flange | |
| Waveguide Body | Aluminum, grey painted | |
| Center Contact | Aluminum, electric conductive oxidation | |

| Product Selection,Customizable | | | |
|--------------------------------|-------|--------|--|
| RFTOP P/N | L(mm) | IL(dB) | |
| RWDGF350-8 | 8 | - | |

Notes

- 1. Customized services include: length and structure and flange type.
- 2. The marked loss is the theoretical estimated loss, for reference only, the specific product after processing test shall prevail.
- 3. Please refer to the second page of the specification of typical electrical performance measured curve.

