




WR112(R84) Straight Waveguide, RWG112-L 6.57-9.99GHz, UBR84 Flange

Dimensions(mm) Tolerance $\pm 1\%$

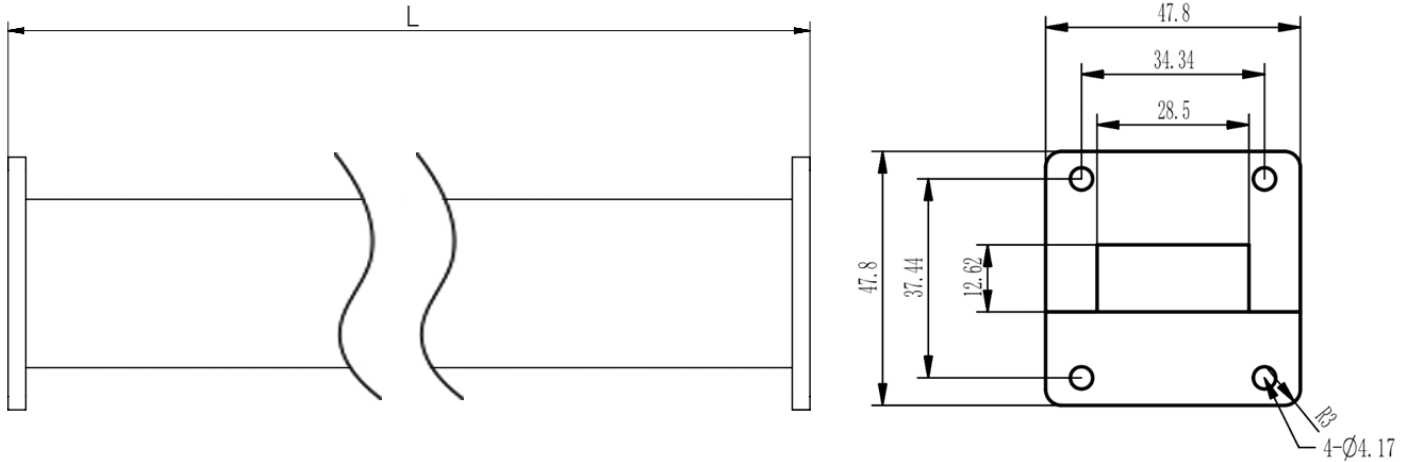

Electrical & Environmental

Frequency Range	6.57-9.99GHz
Temperature Range	-40°C~+70°C

Product Selection, Customizable

RFTOP P/N	L(mm)	IL(dB)
RWG112-100	100	0.07

Mechanical & Product Information

Product Number	RWG112-L
Product Type	Straight Waveguide
Waveguide 1	WR112(R84), UBR84 Flange
Waveguide 2	WR112(R84), UBR84 Flange
Waveguide Body	Aluminum, grey painted
Center Contact	Aluminum, electric conductive oxidation

Notes

1. Customized services include: length and structure and flange type.
2. The marked loss is the theoretical estimated loss, for reference only, the specific product after processing test shall prevail.
3. Please refer to the second page of the specification of typical electrical performance measured curve.



WR112(R84) Straight Waveguide, RWG112-L
6.57-9.99GHz, UBR84 Flange

Typical Test Data

