


WR1800(R5) Straight Waveguide, RWG1800-L 0.41-0.62GHz, UDR5 Flange

Dimensions(mm) Tolerance±1%

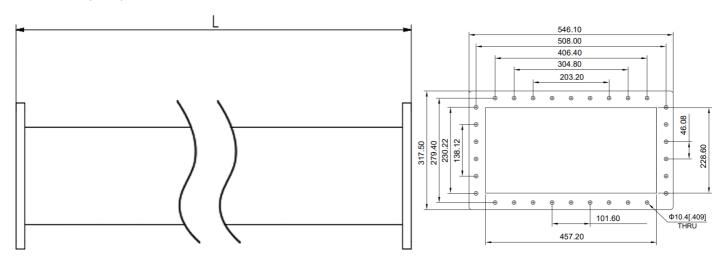

Electrical & Environmental

Frequency Range	0.41-0.62GHz
Temperature Range	-40°C∼+70°C

Product Selection,Customizable			
RFTOP P/N	L(mm)	L2(mm)	IL(dB)

Mechanical & Product Information

Product Number	RWG1800-L
Product Type	Straight Waveguide
Waveguide 1	WR1800(R5), UDR5 Flange
Waveguide 2	WR1800(R5), UDR5 Flange
Waveguide Body	Aluminum, grey painted
Center Contact	Aluminum, electric conductive oxidation

Notes

- 1. Customized services include: length and structure and flange type.
- 2. The marked loss is the theoretical estimated loss, for reference only, the specific product after processing test shall prevail.

