


## WR340(R26) to WR430(R22) Transitional Waveguide, RWG340T430-L 2.4-2.5GHz, UDR26 Flange/UDR22 Flange

### Dimensions(mm) Tolerance $\pm 1\%$

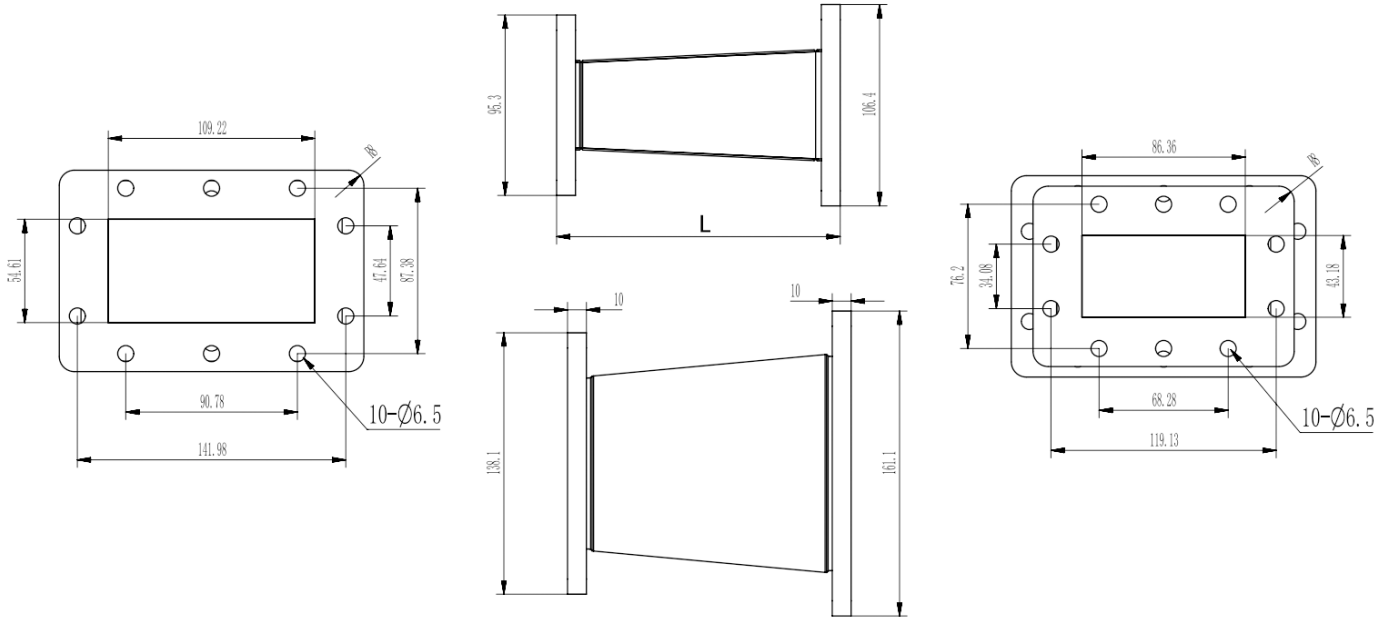

### Electrical & Environmental

Frequency Range	2.4-2.5GHz
VSWR	<1.15 Max
Temperature Range	-40°C~+70°C

### Product Selection, Customizable

RFTOP P/N	L(mm)	IL(dB)
RWG340T430-150	150	0.06

### Mechanical & Product Information

Product Number	RWG340T430-L
Product Type	Transitional Waveguide
Waveguide 1	WR340(R26), UDR26 Flange
Waveguide 2	WR430(R22), UDR22 Flange
Waveguide Body	Aluminum, grey painted
Center Contact	Aluminum, electric conductive oxidation

### Notes

1. Customized services include: length and structure and flange type.
2. The marked loss is the theoretical estimated loss, for reference only, the specific product after processing test shall prevail.
3. Please refer to the second page of the specification of typical electrical performance measured curve.