


# WR1800(R5) Flange Piece, RWGF1800-L 0.41-0.62GHz, UDR5 Flange

## Dimensions(mm) Tolerance±1%

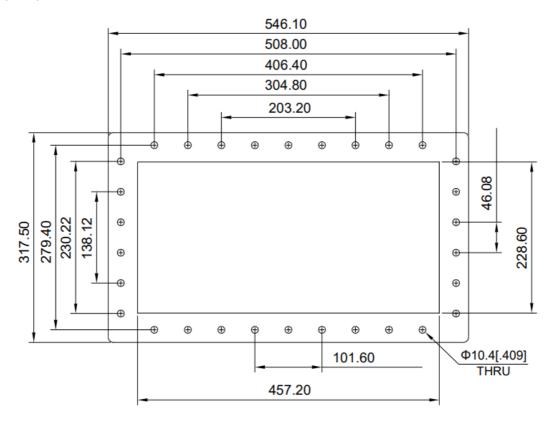

### **Electrical & Environmental**

Frequency Range	0.41-0.62GHz
Temperature Range	-40°C∼+70°C

#### **Mechanical & Product Information**

Product Number	RWGF1800-L	
Product Type	Flange Piece	
Waveguide 1	WR1800(R5), UDR5 Flange	
Waveguide 2	WR1800(R5), UDR5 Flange	
Waveguide Body	Aluminum, grey painted	
Center Contact	Aluminum, electric conductive oxidation	

Product Selection,Customizable			
RFTOP P/N	L(mm)	IL(dB)	
RWGF1800-16	15	0.05	

#### Notes

- 1. Customized services include: length and structure and flange type.
- 2. The marked loss is the theoretical estimated loss, for reference only, the specific product after processing test shall prevail.
- 3. Please refer to the second page of the specification of typical electrical performance measured curve.

