


WR430(R22) Flange Piece, RWGF430-L 1.72-2.61GHz, UDR22 Flange

Dimensions(mm) Tolerance $\pm 1\%$

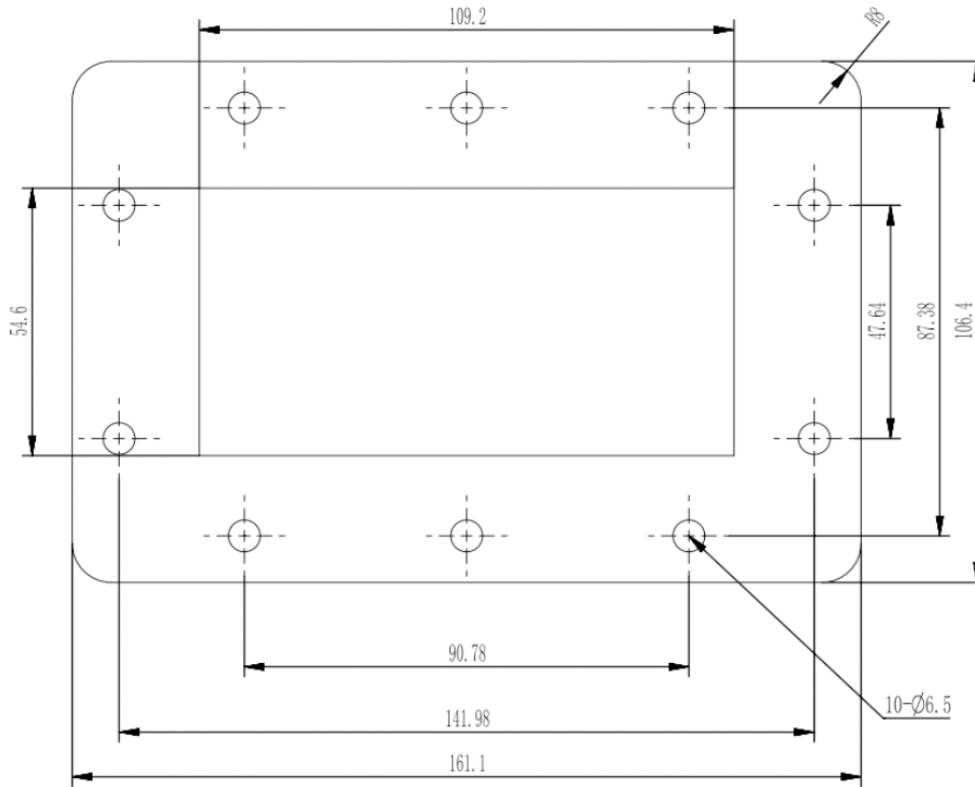

Electrical & Environmental

Frequency Range	1.72-2.61GHz
Temperature Range	-40°C~+70°C

Mechanical & Product Information

Product Number	RWGF430-L
Product Type	Flange Piece
Waveguide 1	WR430(R22), UDR22 Flange
Waveguide 2	WR430(R22), UDR22 Flange
Waveguide Body	Aluminum, grey painted
Center Contact	Aluminum, electric conductive oxidation

Product Selection, Customizable

RFTOP P/N	L(mm)	IL(dB)
RWGF430-1	1	0.05
RWGF430-2	2	0.05
RWGF430-10	10	0.05
RWGF430-20	20	0.05

Notes

1. Customized services include: length and structure and flange type.
2. The marked loss is the theoretical estimated loss, for reference only, the specific product after processing test shall prevail.
3. Please refer to the second page of the specification of typical electrical performance measured curve.