


**WR51(BJ180) Flange Piece, RWGF51-L**  
**14.5-22GHz, FBP180(UBR) Flange**

Dimensions(mm) Tolerance±1%

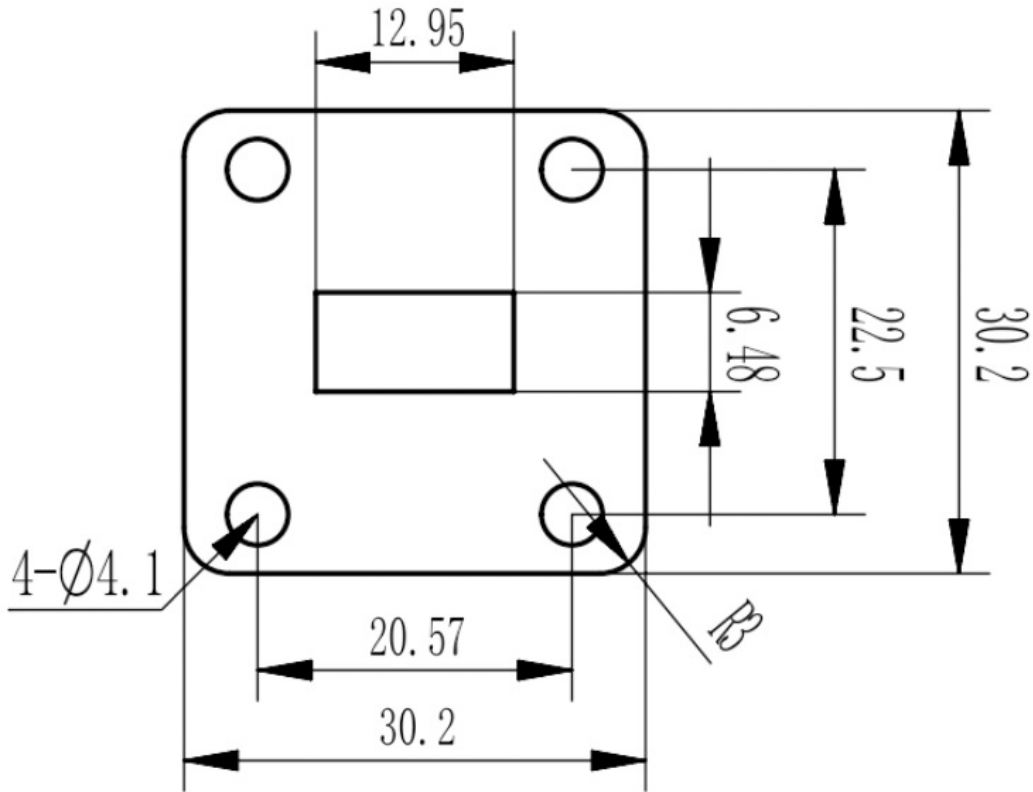

**Electrical & Environmental**

Frequency Range	14.5-22GHz
Temperature Range	-40°C to 70°C

Product Selection, Customizable		
RFTOP P/N	L(mm)	IL(dB)
RWGF51-5	5	0.05

**Mechanical & Product Information**

Product Number	RWGF51-L
Product Type	Flange Piece
Waveguide 1	WR51(BJ180), FBP180(UBR) Flange
Waveguide 2	WR51(BJ180), FBP180(UBR) Flange
Waveguide Body	Copper, grey painted
Center Contact	Copper pickling

Notes

1. Customized services include: length and structure and flange type.
2. The marked loss is the theoretical estimated loss, for reference only, the specific product after processing test shall prevail.
3. Please refer to the second page of the specification of typical electrical performance measured curve.