




## WR62(R140) Flange Piece, RWGF62-L 11.9-18GHz, UBR140 Flange

Dimensions(mm) Tolerance $\pm 1\%$

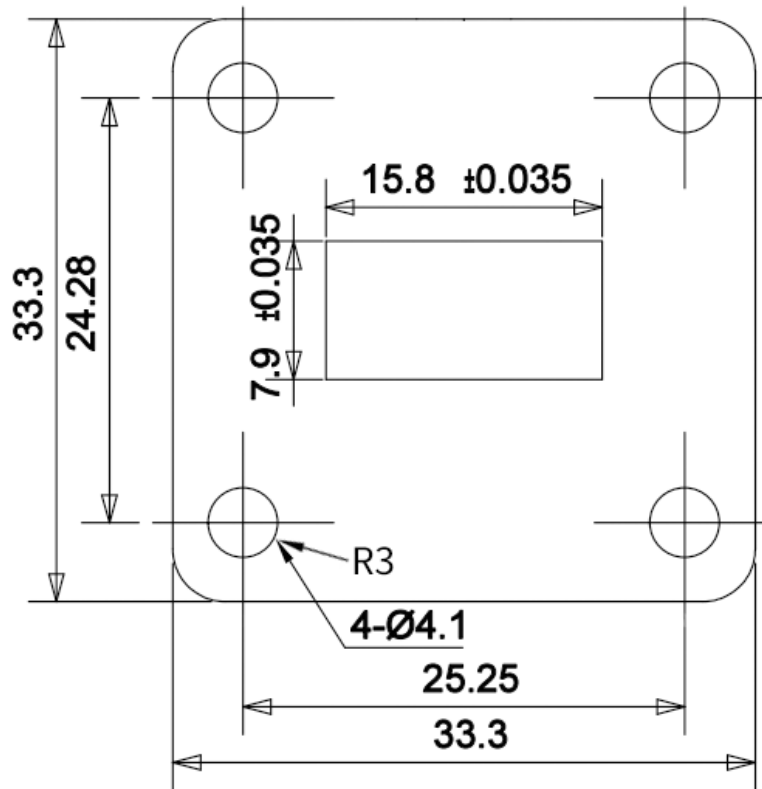

### Electrical & Environmental

Frequency Range	11.9-18GHz
Temperature Range	-40°C~+70°C

### Mechanical & Product Information

Product Number	RWGF62-L
Product Type	Flange Piece
Waveguide 1	WR62(R140), UBR140 Flange
Waveguide 2	WR62(R140), UBR140 Flange
Waveguide Body	Aluminum, grey painted
Center Contact	Aluminum, electric conductive oxidation

### Product Selection, Customizable

RFTOP P/N	L(mm)	IL(dB)
RWGF62-2	2	0.05
RWGF62-3	3	0.05
RWGF62-5	5	0.05

#### Notes

1. Customized services include: length and structure and flange type.
2. The marked loss is the theoretical estimated loss, for reference only, the specific product after processing test shall prevail.
3. Please refer to the second page of the specification of typical electrical performance measured curve.