


WR770(R12) Flange Piece, RWGF770-L 0.96-1.46GHz, UDR12 Flange

Dimensions(mm) Tolerance±1%

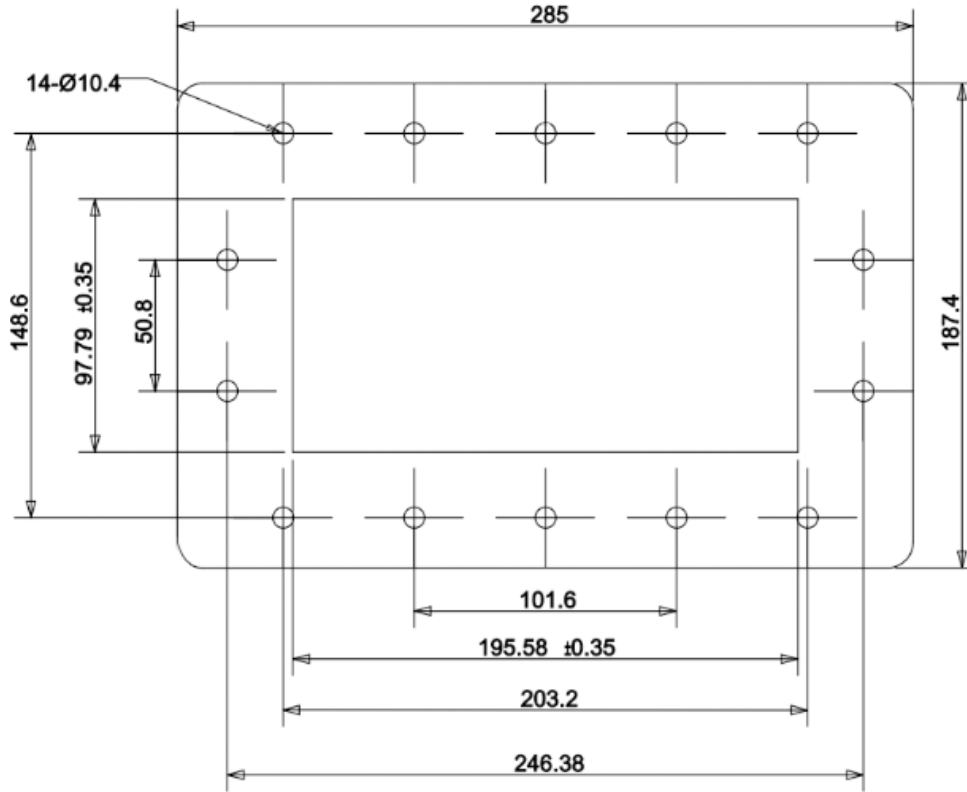

Electrical & Environmental

Frequency Range	0.96-1.46GHz
Temperature Range	-40°C~+70°C

Product Selection, Customizable		
RFTOP P/N	L(mm)	IL(dB)
RWGF770-12	12	0.05

Mechanical & Product Information

Product Number	RWGF770-L
Product Type	Flange Piece
Waveguide 1	WR770(R12), UDR12 Flange
Waveguide 2	WR770(R12), UDR12 Flange
Waveguide Body	Aluminum, grey painted
Center Contact	Aluminum, electric conductive oxidation

Notes

1. Customized services include: length and structure and flange type.
2. The marked loss is the theoretical estimated loss, for reference only, the specific product after processing test shall prevail.
3. Please refer to the second page of the specification of typical electrical performance measured curve.