




WR75(BJ120) Flexible Waveguide, RWGFS75-L
9.84-15GHz, FBP320(UBR) Flange, Seamless

Dimensions(mm) Tolerance±1%

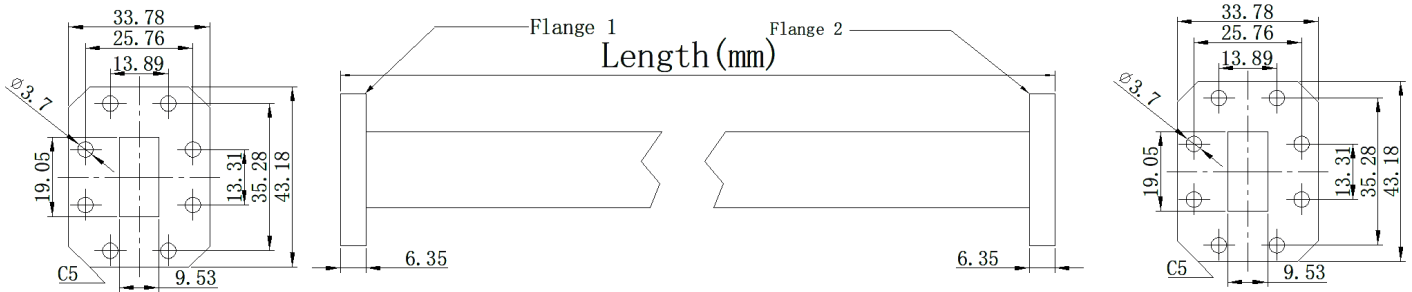

Electrical & Environmental

Frequency Range	9.84-15GHz
VSWR	1.15 Max
Temperature Range	-40°C to 70°C

Product Selection, Customizable		
RFTOP P/N	L(mm)	IL(dB)
RWGFS75-254	254	0.13

Mechanical & Product Information

Product Number	RWGFS75-L
Product Type	Flexible Waveguide
Waveguide 1	WR75(BJ120), FBP320(UBR) Flange
Waveguide 2	WR75(BJ120), FBP320(UBR) Flange
Waveguide Body	Copper
Center Contact	Copper pickling

Notes

1. Customized services include: length and structure and flange type.
2. The marked loss is the theoretical estimated loss, for reference only, the specific product after processing test shall prevail.
3. Please refer to the second page of the specification of typical electrical performance measured curve.



WR75(BJ120) Flexible Waveguide, RWGFS75-L
9.84-15GHz, FBP320(UBR) Flange, Seamless

Typical Test Data

254mm
□