V1.0-202457

WR75(BJ120) Flexible Waveguide, RWGFT75-L
9.84-15GHz, FBP320(UBR) Flange, Twistable

Dimensions(mm) Tolerance±1%

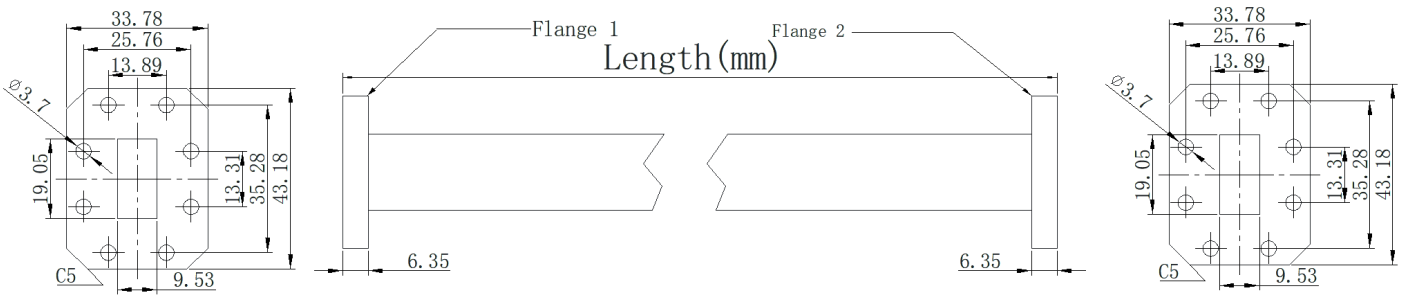

Electrical & Environmental

Frequency Range	9.84-15GHz
VSWR	1.15 Max
Temperature Range	-40°C to70°C

Mechanical & Product Information

Product Number	RWGFT75-L
Product Type	Flexible Waveguide
Waveguide 1	WR75(BJ120), FBP320(UBR) Flange
Waveguide 2	WR75(BJ120), FBP320(UBR) Flange
Waveguide Body	Copper
Center Contact	Copper pickling

Product Selection，Customizable			
RFTOP P/N	L(mm)	L2(mm)	IL(dB)

Notes

1. Customized services include: length and structure and flange type.
2. The marked loss is the theoretical estimated loss, for reference only, the specific product after processing test shall prevail.
3. Please refer to the second page of the specification of typical electrical performance measured curve.