



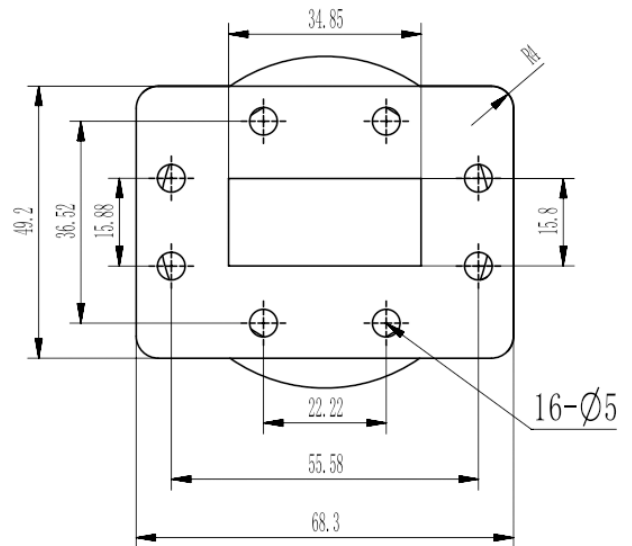

WR137(BJ70) Waveguide Rotary Joint, RWGJI137-L 5.38-8.17GHz, FDP70(UDR) Flange

Dimensions(mm) Tolerance $\pm 1\%$

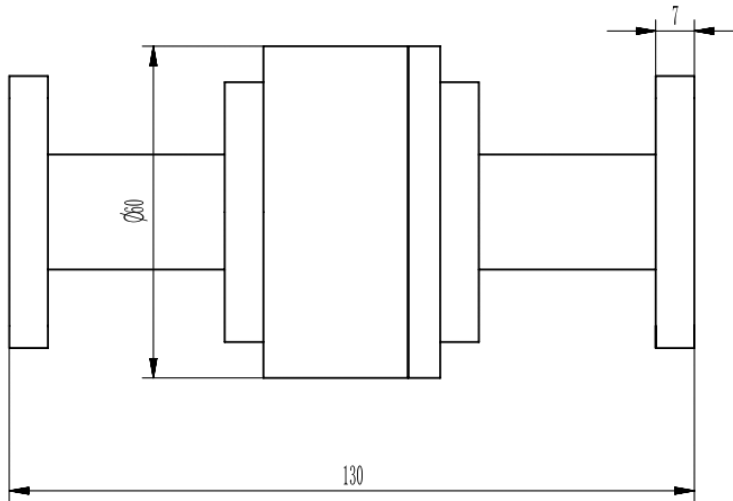

Electrical & Environmental

Frequency Range	5.38-8.17GHz
VSWR	1.2 Max
Temperature Range	-40°C to 70°C

Product Selection, Customizable

RFTOP P/N	L(mm)	IL(dB)
RWGJI137-124	124	0.30
RWGJI137-130	130	0.30

Mechanical & Product Information

Product Number	RWGJI137-L
Product Type	Waveguide Rotary Joint
Waveguide 1	WR137(BJ70), FDP70(UDR) Flange
Waveguide 2	WR137(BJ70), FDP70(UDR) Flange
Waveguide Body	Aluminum, grey painted
Center Contact	Aluminum, electric conductive oxidation

Notes

1. Customized services include: length and structure and flange type.
2. The marked loss is the theoretical estimated loss, for reference only, the specific product after processing test shall prevail.
3. Please refer to the second page of the specification of typical electrical performance measured curve.



WR137(BJ70) Waveguide Rotary Joint, RWGJI137-L 5.38-8.17GHz, FDP70(UDR) Flange

Typical Test Data

