




## WR284(R32) U-Shape Waveguide Rotary Joint, RWGJU284-L1-L2 2.7-2.9GHz, 20000W, UDR32 Flange

### Dimensions(mm) Tolerance±1%

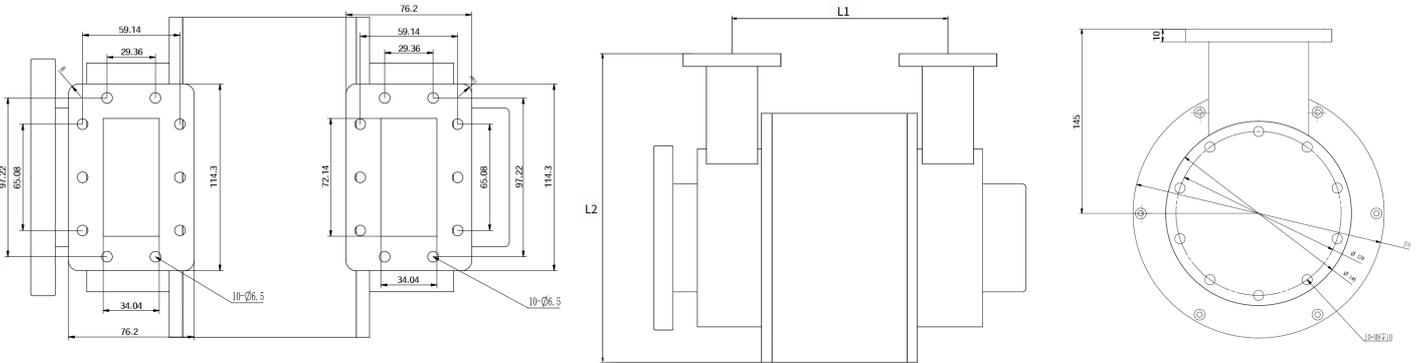

### Electrical & Environmental

Frequency Range	2.7-2.9GHz
VSWR	<1.2 Max±0.03
Input Avg Power	<20000W @25°C
Peak Power	<24000000
Operating Pressure	<43.5psi Max
Temperature Range	-55°C~+75°C

Product Selection, Customizable			
RFTOP P/N	L1(mm)	L2(mm)	IL(dB)
RWGJU284-168-243	168.5	243	≤0.15

### Mechanical & Product Information

Product Number	RWGJU284-L1-L2
Product Type	Waveguide Rotary Joint
Waveguide 1	WR284(R32), UDR32 Flange
Waveguide 2	WR284(R32), UDR32 Flange
Waveguide Body	Copper, grey painted
Center Contact	Copper, pickling

#### Notes

1. Customized services include: length and structure and flange type.
2. The marked loss is the theoretical estimated loss, for reference only, the specific product after processing test shall prevail.
3. Please refer to the second page of the specification of typical electrical performance measured curve.