


WR28(R320) Waveguide Pressure Windows, RWGPW28G 26.3-40GHz, 200W, PBR320 Flange

Dimensions(mm) Tolerance $\pm 1\%$

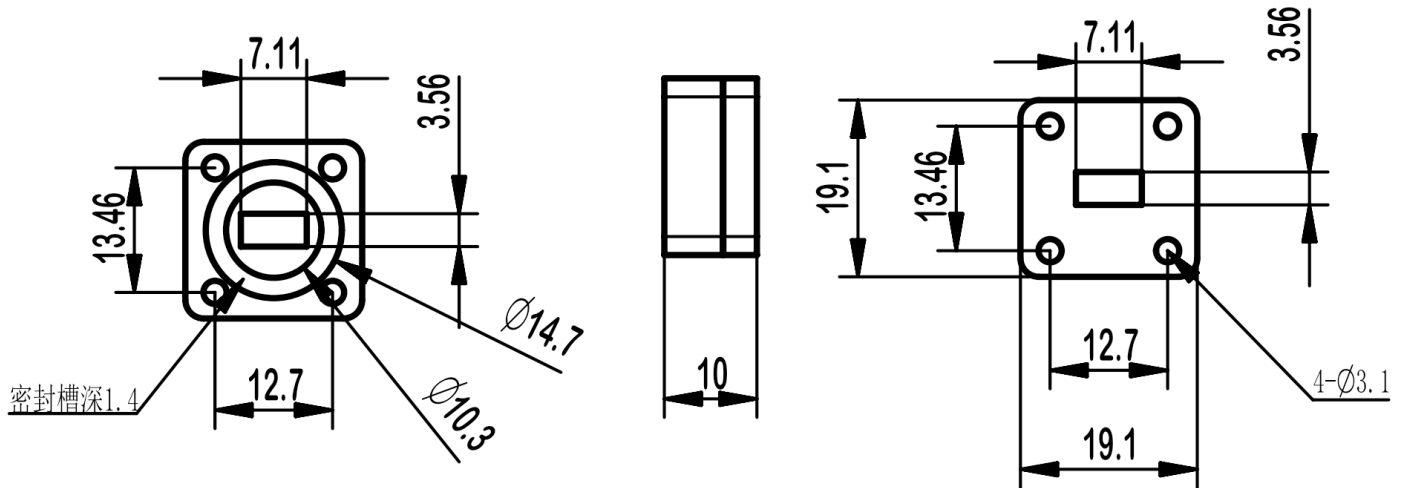

Electrical & Environmental

Frequency Range	26.3-40GHz
VSWR	1.2 Max
Insertion Loss	0.3dB Max
Input Avg Power	200W @25°C
Operating Pressure	100000psig Max
Temperature Range	-40°C~+70°C

Mechanical & Product Information

Product Number	RWGPW28G
Product Type	Waveguide Pressure Windows
Waveguide 1	WR28(R320), PBR320 Flange
Waveguide 2	WR28(R320), UBR320 Flange
Waveguide Body	Copper, grey painted
Center Contact	Copper pickling