




WR51(R180) Waveguide Pressure Windows, RWGPW51G 14.5-22GHz, 300W, PBR180 Flange

Dimensions(mm) Tolerance $\pm 1\%$

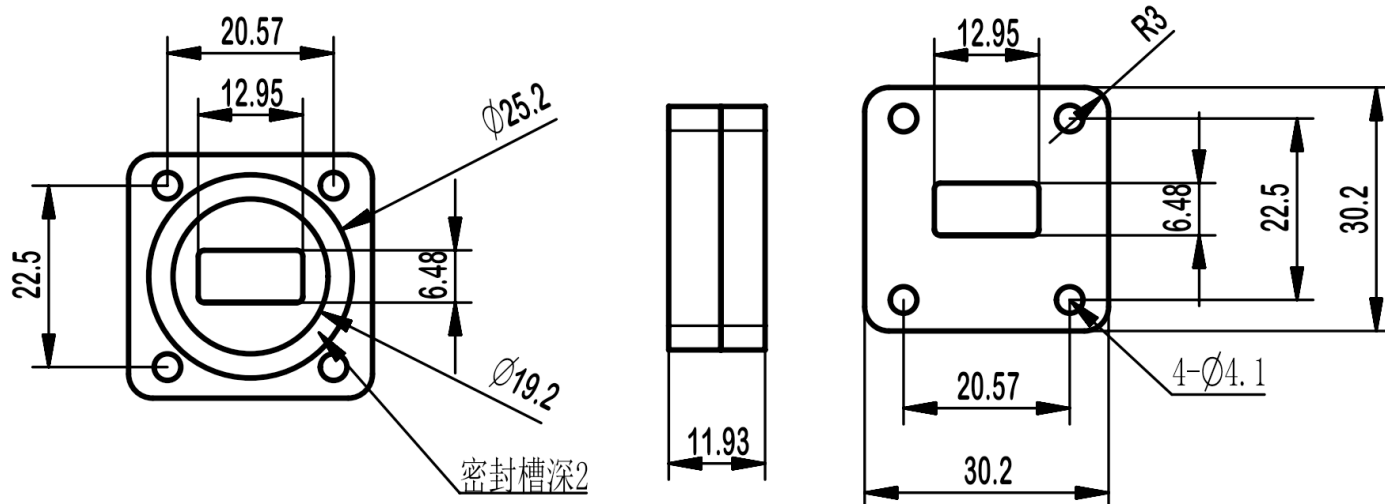

Electrical & Environmental

Frequency Range	14.5-22GHz
VSWR	1.2 Max
Insertion Loss	0.2dB Max
Input Avg Power	300W @25°C
Operating Pressure	100000psig Max
Temperature Range	-40°C~+70°C

Mechanical & Product Information

Product Number	RWGPW51G
Product Type	Waveguide Pressure Windows
Waveguide 1	WR51(R180), PBR180 Flange
Waveguide 2	WR51(R180), UBR180 Flange
Waveguide Body	Copper, grey painted
Center Contact	Copper pickling