




WR75(R120) Waveguide Pressure Windows, RWGPW75G

9.84-15GHz, 300W, PBR120 Flange

Dimensions(mm) Tolerance $\pm 1\%$

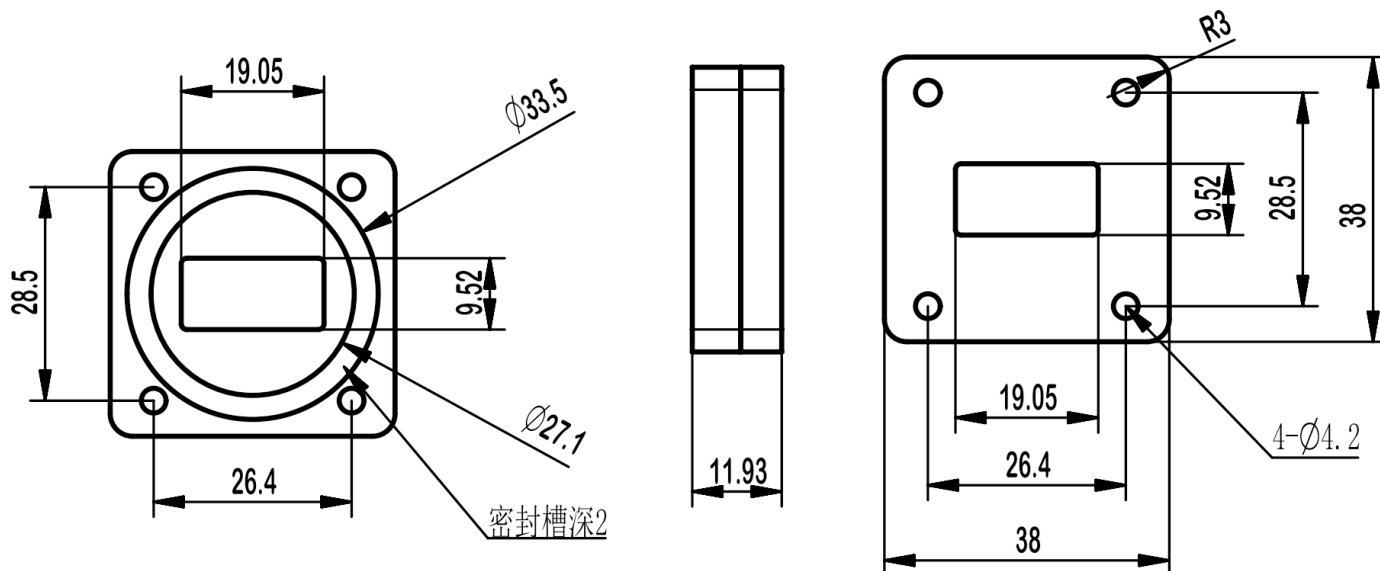

Electrical & Environmental

Frequency Range	9.84-15GHz
VSWR	1.2 Max
Insertion Loss	0.2dB Max
Input Avg Power	300W @25°C
Operating Pressure	100000psig Max
Temperature Range	-40°C~+70°C

Mechanical & Product Information

Product Number	RWGPW75G
Product Type	Waveguide Pressure Windows
Waveguide 1	WR75(R120), PBR120 Flange
Waveguide 2	WR75(R120), UBR120 Flange
Waveguide Body	Copper, grey painted
Center Contact	Copper pickling
Net Weight	About 108.0g



WR75(R120) Waveguide Pressure Windows, RWGPW75G 9.84-15GHz, 300W, FBM120/FBP120 Flange

Typical Test Data

