


**WR770(BJ12) Short-circuiter, RWGSC770**  
**0.96-1.46GHz, FDP12(UDR) Flange**

**Dimensions(mm) Tolerance±1%**

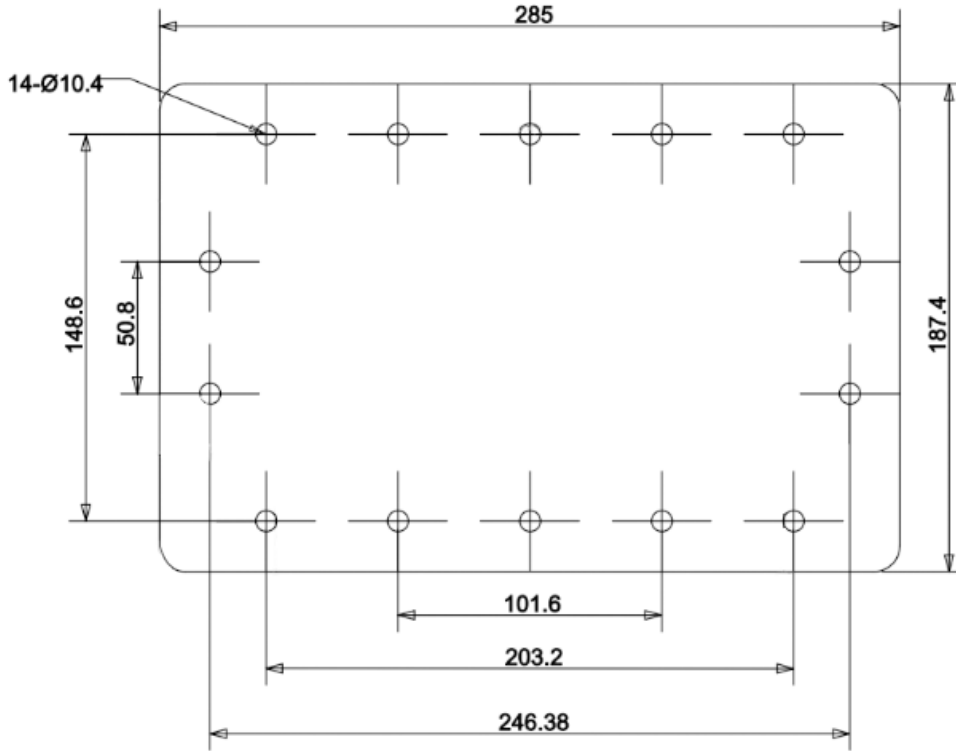

**Electrical & Environmental**

<b>Frequency Range</b>	0.96-1.46GHz
<b>Temperature Range</b>	-40°C to 70°C

**Mechanical & Product Information**

<b>Product Number</b>	RWGSC770
<b>Product Type</b>	Short-circuiter
<b>Waveguide 1</b>	WR770(BJ12), FDP12(UDR) Flange
<b>Waveguide 2</b>	WR770(BJ12), FDP12(UDR) Flange
<b>Waveguide Body</b>	Aluminum, grey painted
<b>Center Contact</b>	Aluminum, electric conductive oxidation