


WR770(R12) Radius Right Angle Bent Waveguide, RWGWE770-L1-L2
0.96-1.46GHz, UDR12 Flange, E-Bend

Dimensions(mm) Tolerance $\pm 1\%$

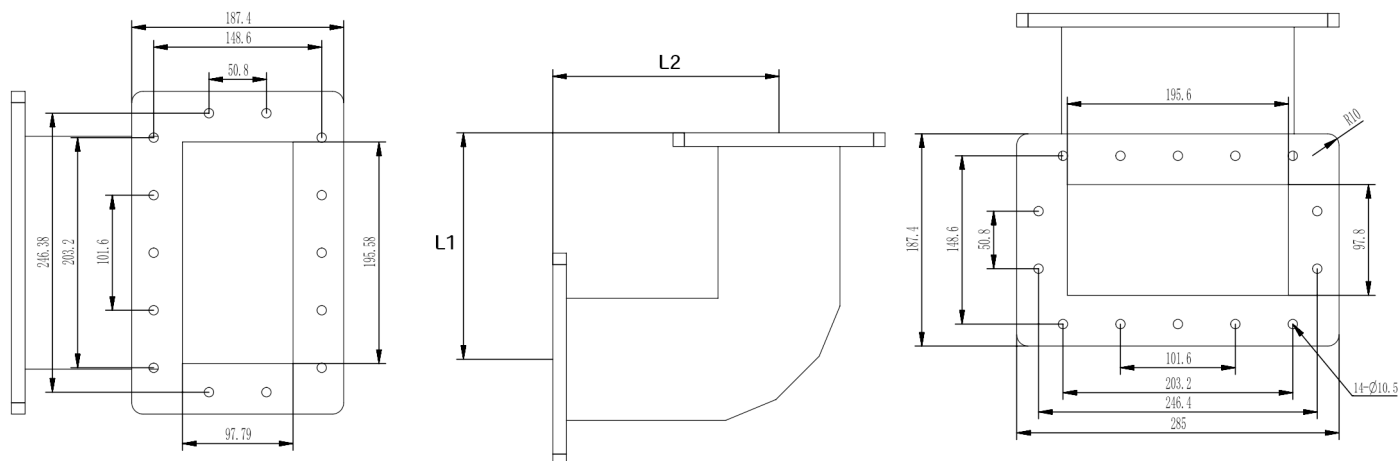

Electrical & Environmental

Frequency Range	0.96-1.46GHz
VSWR	<1.15 Max
Temperature Range	-40°C~+70°C

Mechanical & Product Information

Product Number	RWGWE770-L1-L2
Product Type	Bent Waveguide
Waveguide 1	WR770(R12), UDR12 Flange
Waveguide 2	WR770(R12), UDR12 Flange
Waveguide Body	Aluminum, grey painted
Center Contact	Aluminum, electric conductive oxidation

Product Selection, Customizable

RFTOP P/N	L1(mm)	L2(mm)	IL(dB)
RWGWE770-200-200	200	200	≤0.10

Notes

1. Customized services include: length and structure and flange type.
2. The marked loss is the theoretical estimated loss, for reference only, the specific product after processing test shall prevail.
3. Please refer to the second page of the specification of typical electrical performance measured curve.