


WR90(R100) Radius Right Angle Bent Waveguide, RWGWE90D-L1-L2 8.2-12.5GHz, UDR100 Flange, E-Bend

Dimensions(mm) Tolerance $\pm 1\%$

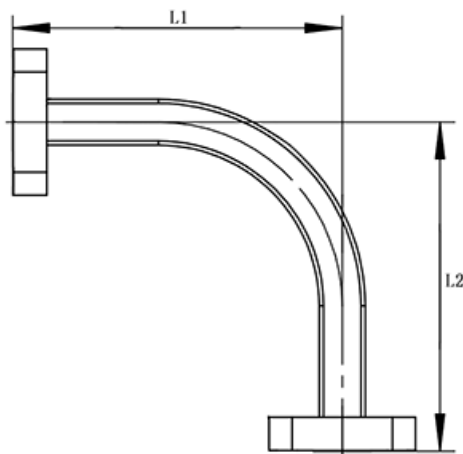

Electrical & Environmental

Frequency Range	8.2-12.5GHz
VSWR	1.06 Max
Temperature Range	-55°C~+85°C

Product Selection, Customizable			
RFTOP P/N	L1(mm)	L2(mm)	IL(dB)
RWGWE90D-91-91	91	91	0.12

Mechanical & Product Information

Product Number	RWGWE90D-L1-L2
Product Type	Bent Waveguide
Waveguide 1	WR90(R100), UDR100 Flange
Waveguide 2	WR90(R100), UDR100 Flange
Waveguide Body	Copper, grey painted
Center Contact	Copper, pickling

Notes

1. Customized services include: length and structure and flange type.
2. The marked loss is the theoretical estimated loss, for reference only, the specific product after processing test shall prevail.
3. Please refer to the second page of the specification of typical electrical performance measured curve.