


WR975(R9) Radius Right Angle Bent Waveguide, RWGWH975-L1-L2 0.76-1.15GHz, UDR9 Flange, H-Bend

Dimensions(mm) Tolerance $\pm 1\%$

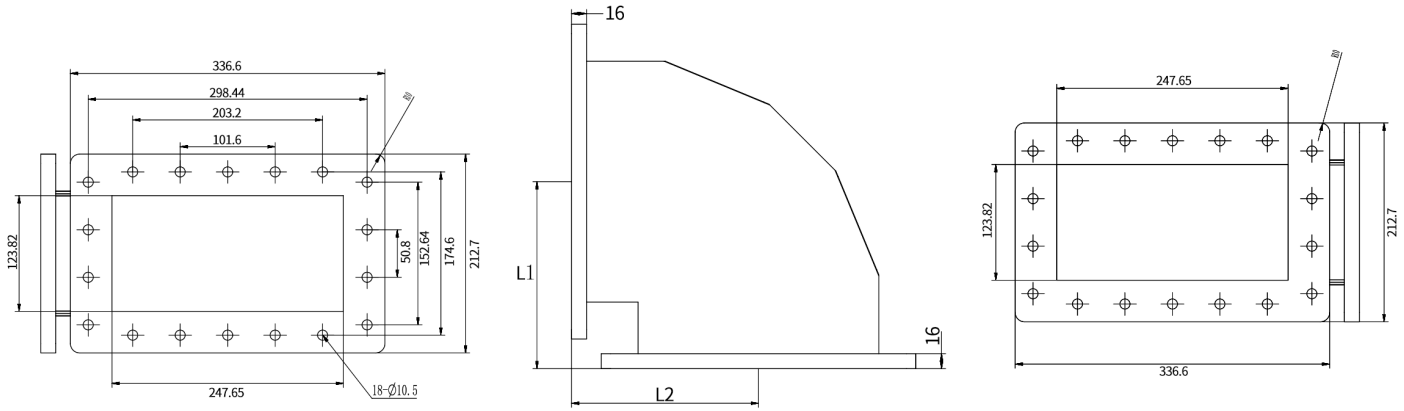

Electrical & Environmental

Frequency Range	0.76-1.15GHz
VSWR	1.2 Max
Temperature Range	-40°C~+85°C

Product Selection, Customizable			
RFTOP P/N	L1(mm)	L2(mm)	IL(dB)
RWGWH975-200-200	200	200	≤ 0.10

Mechanical & Product Information

Product Number	RWGWH975-L1-L2
Product Type	Bent Waveguide
Waveguide 1	WR975(R9), UDR9 Flange
Waveguide 2	WR975(R9), UDR9 Flange
Waveguide Body	Aluminum, grey painted
Center Contact	Aluminum, pickling

Notes

1. Customized services include: length and structure and flange type.
2. The marked loss is the theoretical estimated loss, for reference only, the specific product after processing test shall prevail.
3. Please refer to the second page of the specification of typical electrical performance measured curve.