


SMP(GPO) Female Coaxial Termination, RT182PF DC-18GHz, 2W, Round

Dimensions(mm) Tolerance±1%

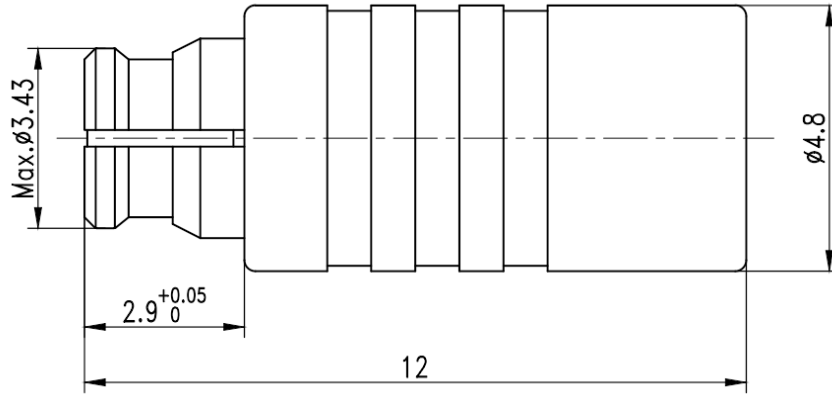

Electrical & Environmental

Frequency Range	DC-18GHz	Impedance	50 ohm	VSWR	1.3 max
Input Avg Power	2W @25°C	Peak Power	100W (5μsec pulse width, 0.4% duty cycle)		

Mechanical & Product Information

Product Number	RT182PF, U-Grade	Connector	SMP(GPO) Female
Connector Body	BeCu/Brass,Gold plating	Heat Sink	N/A
Center Contact	Gold plated beryllium copper		
Operating Temp	-55°C~+125°C	Net Weight	-

- 1.Customized connectors, dimensions, PIM, VSWR.
- 2.Refer to the RFTOP Termination selection and usage guide.

Notes: To ensure longevity and performance, do not use at full power for a long time. Peak power, pulse width, and duty cycle need to meet the requirements. Input high power, require heat dissipation, maintain temperature within 60°C. Reference Curve,derate linearly to 0.2W at 100°C.

