




N Female Coaxial Termination, RT18300NFA DC-18GHz, 300W, Rectangular

Dimensions(mm) Tolerance±1%

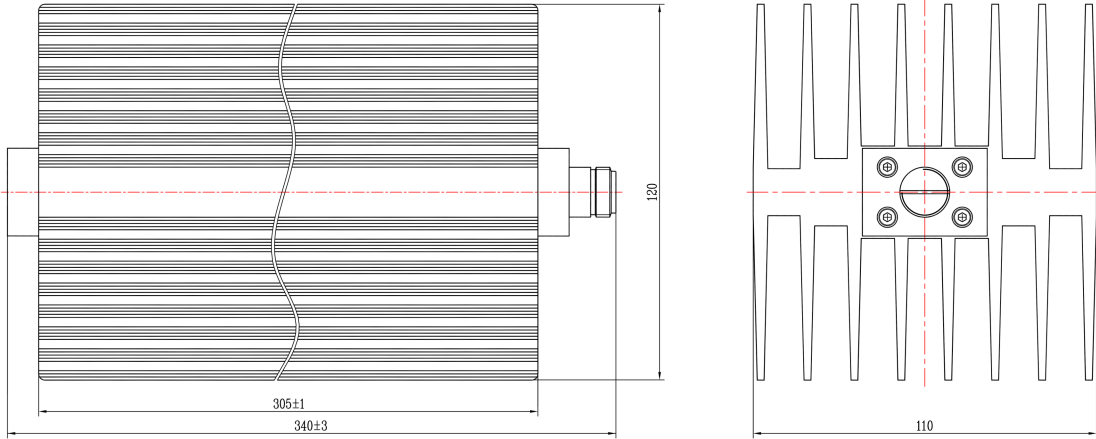


Electrical & Environmental

Frequency Range	DC-18GHz	Impedance	50 ohm	VSWR	1.45 max
Input Avg Power	300W @25°C	Peak Power	1kW (5μsec pulse width, 10% duty cycle)		

Mechanical & Product Information

Product Number	RT18300NFA, P-Grade	Connector	N Female
Connector Body	Passivated stainless steel	Heat Sink	Black anodized aluminum
Center Contact	Gold plated beryllium copper		
Operating Temp	-55°C~+125°C	Net Weight	About 3.7kg

Typical Test Data

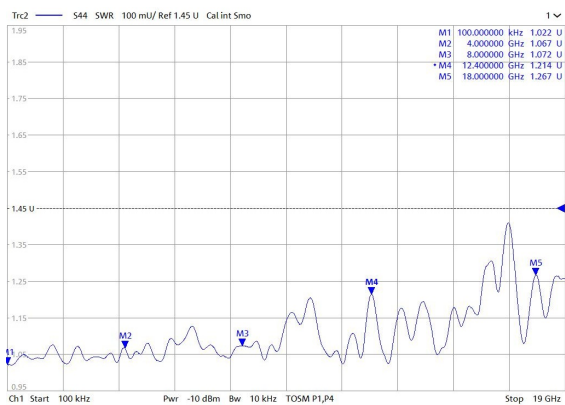

1. Customized connectors, dimensions, PIM, VSWR.
2. Refer to the RFTOP Termination selection and usage guide.

Notes: To ensure longevity and performance, do not use at full power for a long time. Peak power, pulse width, and duty cycle need to meet the requirements. Input high power, require heat dissipation, maintain temperature within 60°C. Reference Curve, derate linearly to 30W at 100°C.

