




SMA Female Coaxial Termination, RT2710SF DC-26.5GHz, 10W, Round

Dimensions(mm) Tolerance±1%

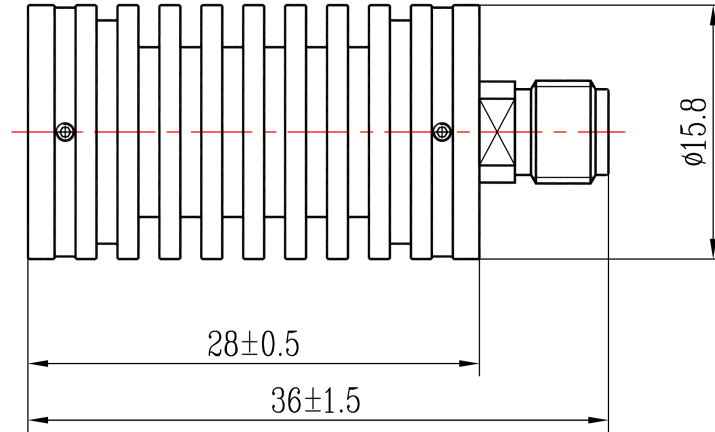


Electrical & Environmental

Frequency Range	DC-26.5GHz	Impedance	50 ohm	VSWR	1.3 max
Input Avg Power	10W @25°C	Peak Power	500W (5μsec pulse width, 1% duty cycle)		

Mechanical & Product Information

Product Number	RT2710SF, P-Grade	Connector	SMA Female
Connector Body	Passivated stainless steel	Heat Sink	Black anodized aluminum
Center Contact	Gold plated beryllium copper		
Operating Temp	-55°C~+125°C	Net Weight	About 12.8g

Typical Test Data

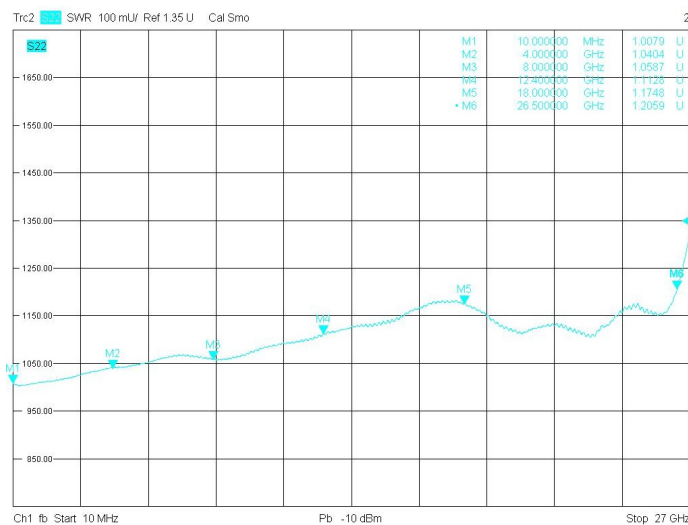

Notes

1. Customized outlines and optimal VSWR available.
2. Refer to the derating curve for power input, derate linearly to 1W at 100°C.
3. To maintain best performance, recommended to use fan to keep the case temp under 85°C.

