


SMP(GPO) Male Coaxial Termination, RT401SPM DC-40GHz, 1W, Round

Dimensions(mm) Tolerance $\pm 1\%$

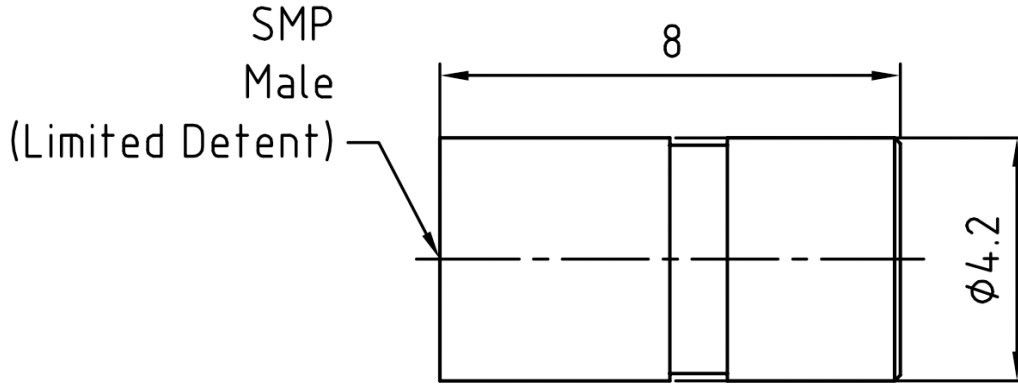

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm	VSWR	1.3 max
Input Avg Power	1W @25°C	Peak Power	50W (5 μ sec pulse width, 0.4% duty cycle)		

Mechanical & Product Information

Product Number	RT401SPM	Connector	SMP(GPO) Male
Connector Body	Gold plated beryllium copper	Heat Sink	N/A
Center Contact	Gold plated beryllium copper		
Operating Temp		Net Weight	-

Typical Test Data

Notes

1. Customized outlines and optimal VSWR available.
2. Refer to the derating curve for power input, derate linearly to 0.1W at 100°C.

