




## 2.92mm Male Coaxial Termination, RT402M-3 DC-40GHz, 2W, Round

### Dimensions(mm) Tolerance±1%

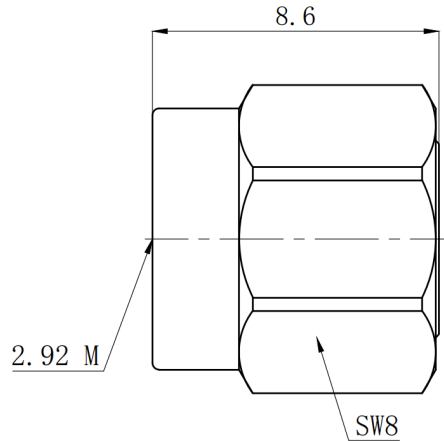

Product Grade	
Grade	VSWR
Standard	max
Level B	1.15 max


### Electrical & Environmental

<b>Frequency Range</b>	DC-40GHz	<b>Impedance</b>	50 ohm	<b>VSWR</b>	1.25 max
<b>Input Avg Power</b>	2W @25°C	<b>Peak Power</b>	20W (5μsec pulse width, 1% duty cycle)		

### Mechanical & Product Information

<b>Product Number</b>	RT402M-3, Economical	<b>Connector</b>	2.92mm Male
<b>Connector Body</b>	Passivated stainless steel	<b>Heat Sink</b>	N/A
<b>Center Contact</b>	Gold plated brass		
<b>Operating Temp</b>		<b>Net Weight</b>	About 2.4g

### Typical Test Data

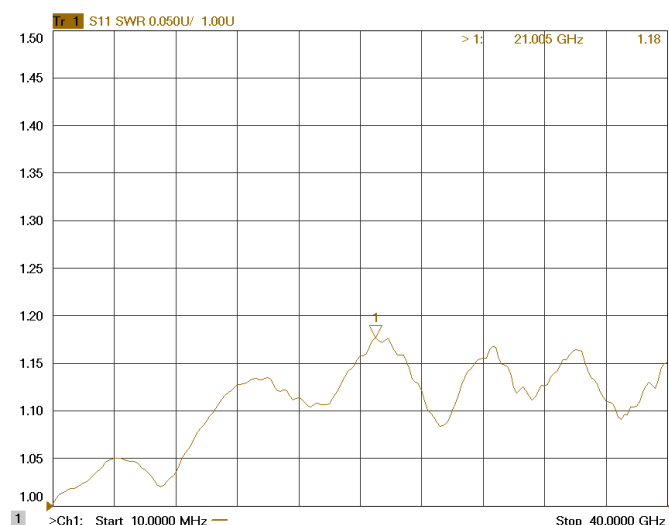

### Notes

1. Customized outlines and optimal VSWR available.
2. Refer to the derating curve for power input, derate linearly to 0.2W at 100°C.

