




## SSMP(GPPO,SMPM) Female Coaxial Termination, RT402MPF DC-40GHz, 2W, Round

Dimensions(mm) Tolerance $\pm 1\%$

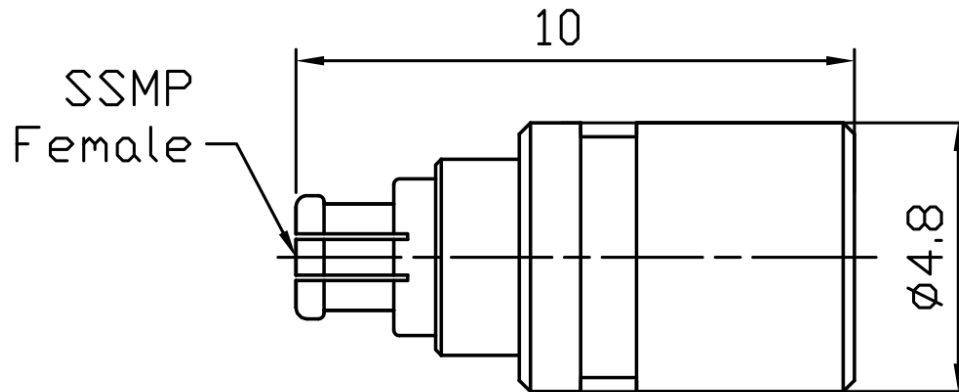


### Electrical & Environmental

<b>Frequency Range</b>	DC-40GHz	<b>Impedance</b>	50 ohm	<b>VSWR</b>	1.4 max
<b>Input Avg Power</b>	2W @25°C	<b>Peak Power</b>	100W (5 $\mu$ sec pulse width, 0.4% duty cycle)		

### Mechanical & Product Information

<b>Product Number</b>	RT402MPF	<b>Connector</b>	SSMP(GPPO,SMPM) Female
<b>Connector Body</b>	Gold plated beryllium copper	<b>Heat Sink</b>	N/A
<b>Center Contact</b>	Gold plated beryllium copper		
<b>Operating Temp</b>	-55°C~+125°C	<b>Net Weight</b>	About 0.8g

### Typical Test Data

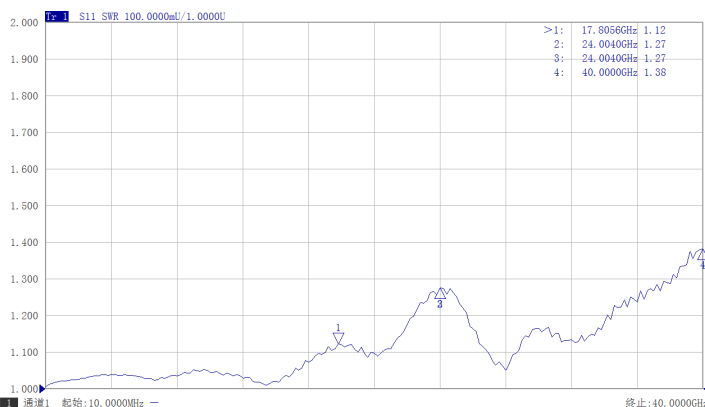

1. Customized connectors, dimensions, PIM, VSWR.
2. Refer to the RFTOP Termination selection and usage guide.

**Notes:** To ensure longevity and performance, do not use at full power for a long time. Peak power, pulse width, and duty cycle need to meet the requirements. Input high power, require heat dissipation, maintain temperature within 60°C. Reference Curve, derate linearly to 0.2W at 100°C.

