


2.92mm(K,SK) Female Coaxial Termination, RT4030FX DC-40GHz, 30W, Round

Dimensions(mm) Tolerance $\pm 1\%$

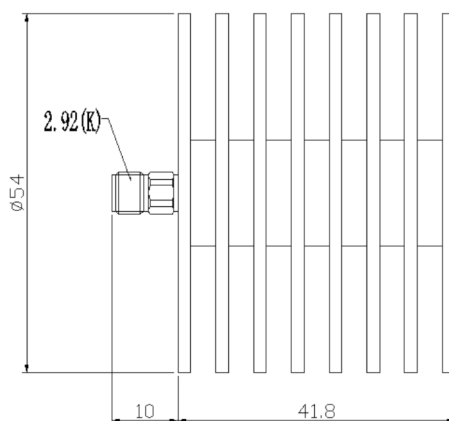

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm	VSWR	1.3 max
Input Avg Power	30W @25°C	Peak Power	200W (5μsec pulse width, 5% duty cycle)		

Mechanical & Product Information

Product Number	RT4030FX, P-Grade	Connector	2.92mm(K,SK) Female
Connector Body	Passivated stainless steel	Heat Sink	Black anodized aluminum
Center Contact	1.27μm gold plated beryllium copper		
Operating Temp	-55°C~+125°C	Net Weight	About 113.0g

- 1.Customized connectors, dimensions, PIM, VSWR.
- 2.Refer to the RFTOP Termination selection and usage guide.

Notes: To ensure longevity and performance, do not use at full power for a long time. Peak power, pulse width, and duty cycle need to meet the requirements. Input high power, require heat dissipation, maintain temperature within 60°C. Reference Curve,derate linearly to 3W at 100°C.

