




WR12(BJ740) Waveguide Matched Termination, RWT12 60.5-91.9GHz, 0.5W, FUGP740 Circular Flange, Round

Dimensions(mm) Tolerance±1%

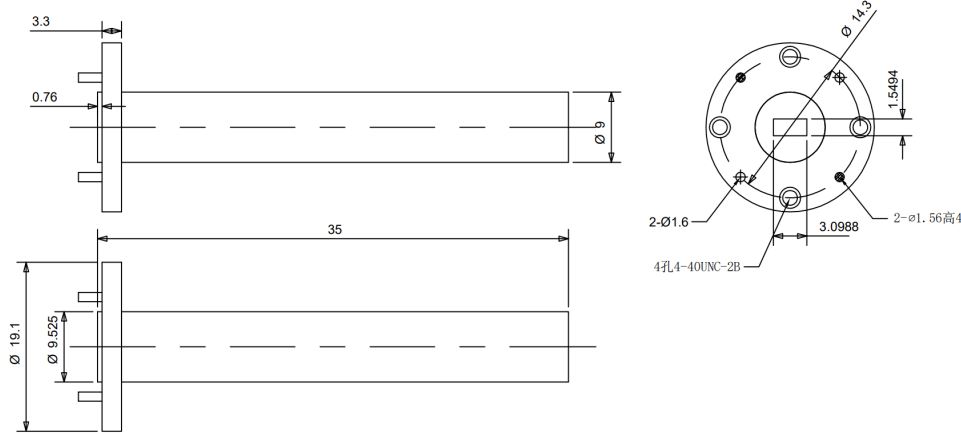


Electrical & Environmental

Frequency Range	60.5-91.9GHz	Impedance	50 ohm	VSWR	1.05 max
Input Avg Power	0.5W @25°C	Peak Power	-		

Mechanical & Product Information

Product Number	RWT12, H-Grade	Waveguide	WR12(BJ740), FUGP740 Circular Flange
Waveguide Body	Copper, gold plated	Heat Sink	N/A
Waveguide Cavity	Copper, gold plated		
Operating Temp	-55°C~+100°C	Net Weight	About 24.0g

Typical Test Data

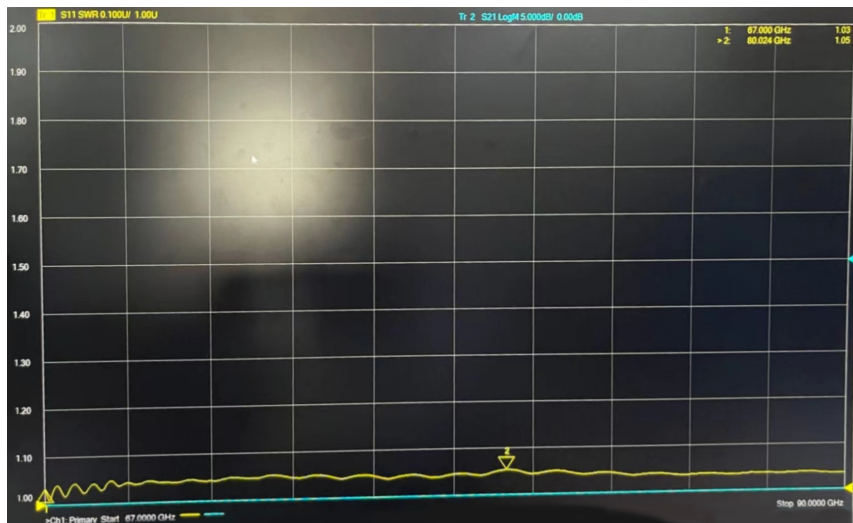

Notes

1. Customized outlines and optimal VSWR available.
2. Refer to the derating curve for power input, derate linearly to 0.1W at 100°C.

