


WR159(BJ58) Waveguide Termination, **RWT1592500** 4.64-7.05GHz, 2500W, FDP58(UDR) Flange, Rectangular

Dimensions(mm) Tolerance±1%

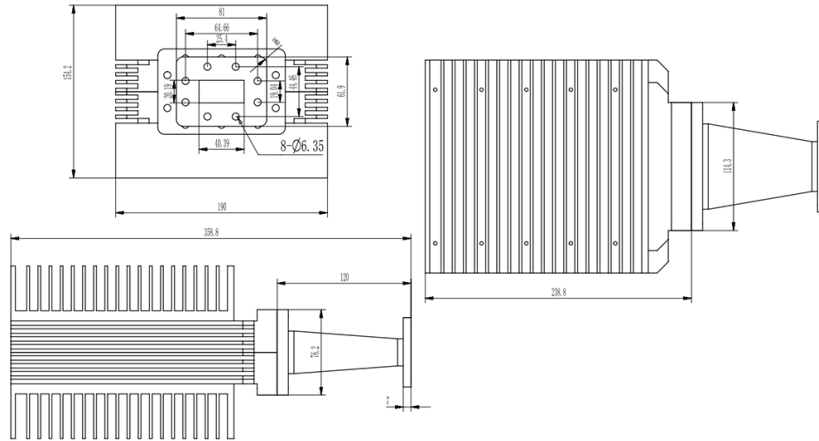

Electrical & Environmental

Frequency Range	4.64-7.05GHz	Impedance	50 ohm	VSWR	1.2 max
Input Avg Power	2500W @25°C	Peak Power	-		

Mechanical & Product Information

Product Number	RWT1592500, Professional	Waveguide/Flange	WR159(BJ58), FDP58(UDR) Flange
Waveguide Body	Aluminum, black painted	Heat Sink	Black anodized aluminum
Waveguide Cavity	Aluminum, electric conductive oxidation		
Operating Temp		Net Weight	-

Typical Test Data

Notes

1. Customized outlines and optimal VSWR available.
2. Refer to the derating curve for power input, derate linearly to 250W at 100°C.
3. To maintain best performance, recommended to use fan to keep the case temp under 85°C.

