




**WR15(BJ620) Waveguide Matched Termination, RWT15
49.8-75.8GHz, 0.5W, FUGP620 Circular Flange, Round**

Dimensions(mm) Tolerance±1%

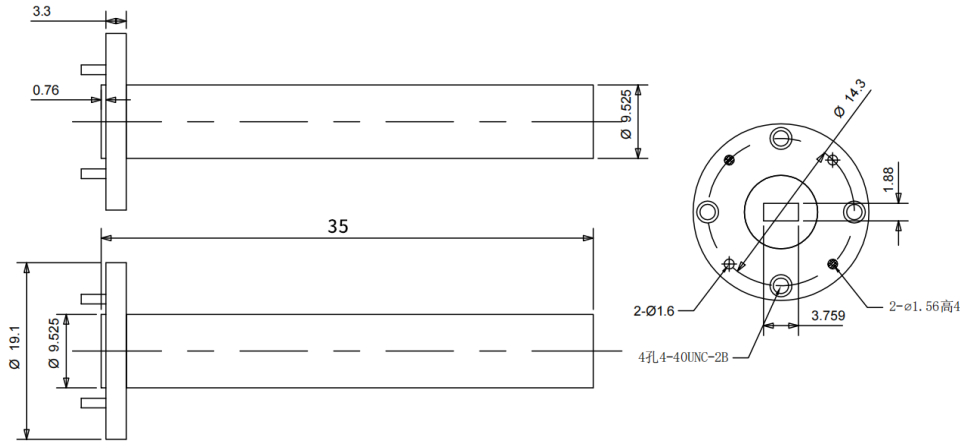


Electrical & Environmental

Frequency Range	49.8-75.8GHz	Impedance	50 ohm	VSWR	1.04 max
Input Avg Power	0.5W @25°C	Peak Power	-		

Mechanical & Product Information

Product Number	RWT15, High-Precision	Waveguide/Flange	WR15(BJ620), FUGP620 Circular Flange
Waveguide Body	Copper, gold plated	Heat Sink	N/A
Waveguide Cavity	Copper, gold plated		
Operating Temp		Net Weight	About 22.2g

Typical Test Data

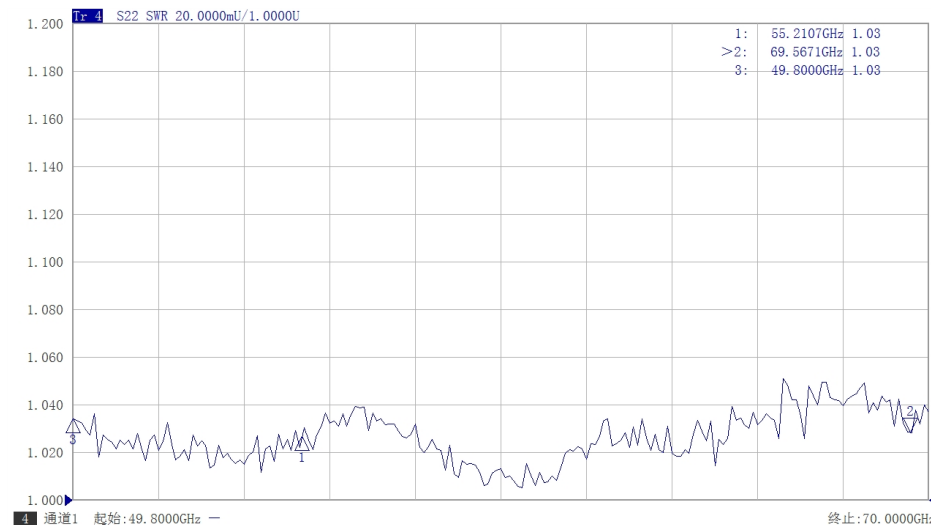

Notes

1. Customized outlines and optimal VSWR available.
2. Refer to the derating curve for power input, derate linearly to 0.1W at 100°C.

