


WR19(BJ500) Waveguide Matched Termination, RWT19-2 39.2-59.6GHz, 0.5W, FUGP500 Circular Flange, Round

Dimensions(mm) Tolerance $\pm 1\%$

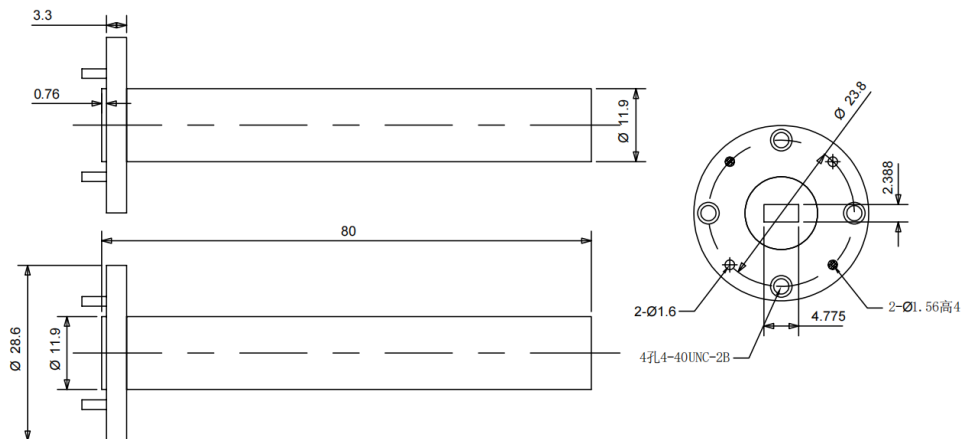

Electrical & Environmental

Frequency Range	39.2-59.6GHz	Impedance	50 ohm	VSWR	1.04 max
Input Avg Power	0.5W @25°C	Peak Power	-		

Mechanical & Product Information

Product Number	RWT19-2, High-Precision	Waveguide/Flange	WR19(BJ500), FUGP500 Circular Flange
Waveguide Body	Copper, gold plated	Heat Sink	N/A
Waveguide Cavity	Copper, gold plated		
Operating Temp		Net Weight	-

Typical Test Data

Notes

1. Customized outlines and optimal VSWR available.
2. Refer to the derating curve for power input, derate linearly to 0.1W at 100°C.

