


WR22(BJ400) Waveguide Matched Termination, RWT22-2 32.9-50.1GHz, 0.5W, FUGP400 Circular Flange, Round

Dimensions(mm) Tolerance $\pm 1\%$

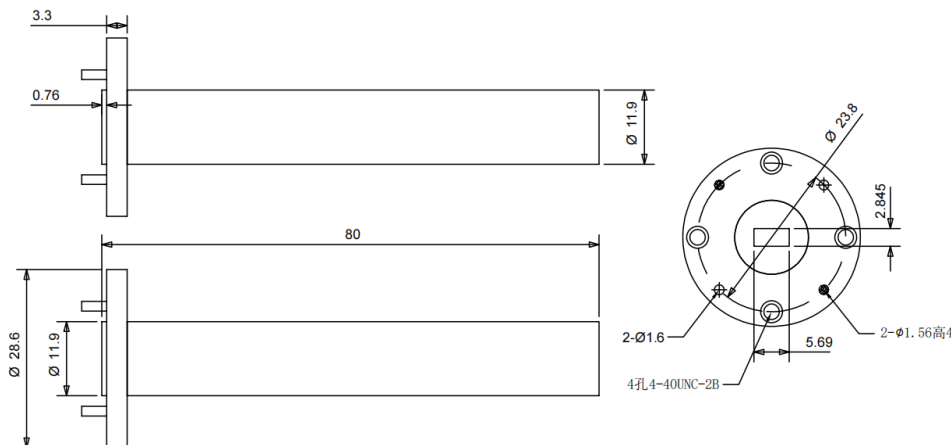

Electrical & Environmental

Frequency Range	32.9-50.1GHz	Impedance	50 ohm	VSWR	1.04 max
Input Avg Power	0.5W @25°C	Peak Power	-		

Mechanical & Product Information

Product Number	RWT22-2, High-Precision	Waveguide/Flange	WR22(BJ400), FUGP400 Circular Flange
Waveguide Body	Copper, gold plated	Heat Sink	N/A
Waveguide Cavity	Copper, gold plated		
Operating Temp		Net Weight	-

Typical Test Data

Notes

1. Customized outlines and optimal VSWR available.
2. Refer to the derating curve for power input, derate linearly to 0.1W at 100°C.

