WR229(BJ40) Waveguide Termination, RWT2292500
3.22-4.9GHz, 2500W, FDP40(UDR) Flange, Rectangular

Dimensions(mm) Tolerance±1%

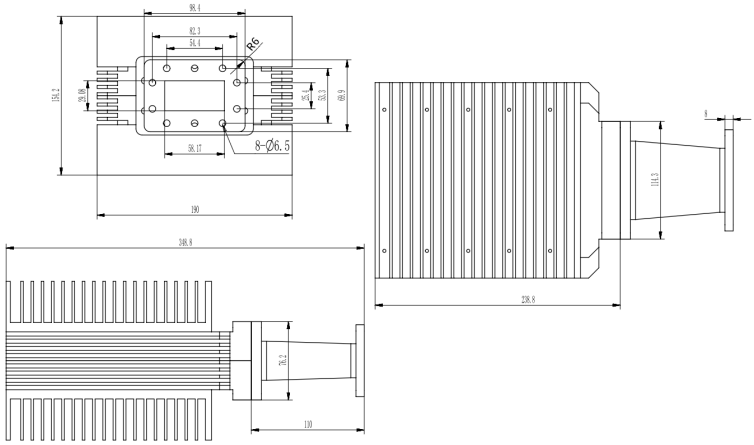

Electrical & Environmental

Frequency Range	3.22-4.9GHz	**Impedance**	50 ohm	**VSWR**	1.2 max
Input Avg Power	2500W @25℃	**Peak Power**	-		

Mechanical & Product Information

Product Number	RWT2292500, Professional	**Waveguide/Flange**	WR229(BJ40), FDP40(UDR) Flange
Waveguide Body	Aluminum, black painted	**Heat Sink**	Black anodized aluminum
Waveguide Cavity	Aluminum, electric conductive oxidation		
Operating Temp		**Net Weight**	-

Typical Test Data

Notes

1.Customized outlines and optimal VSWR available.

2. Refer to the derating curve for power input,derate linearly to **250W at 100℃**.

3.To maintain best performance, recommended to use fan to keep the case temp under 85°C.