WR34(BJ260) Waveguide Termination, RWT34100
21.7-33GHz, 100W, FBP260(UBR) Flange, Rectangular

Dimensions(mm) Tolerance±1%

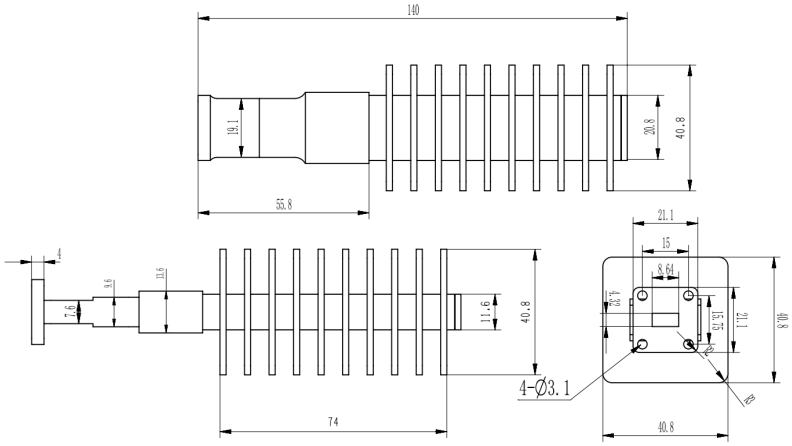

Electrical & Environmental

Frequency Range	21.7-33GHz	**Impedance**	50 ohm	**VSWR**	1.2 max
Input Avg Power	100W @25℃	**Peak Power**	-		

Mechanical & Product Information

Product Number	RWT34100, Professional	**Waveguide/Flange**	WR34(BJ260), FBP260(UBR) Flange
Waveguide Body	Copper, black painted	**Heat Sink**	Black anodized aluminum
Waveguide Cavity	Copper, electric conductive oxidation		
Operating Temp		**Net Weight**	-

Typical Test Data

Notes

1.Customized outlines and optimal VSWR available.

2. Refer to the derating curve for power input,derate linearly to **10W at 100°C**.

3.To maintain best performance, recommended to use fan to keep the case temp under 85°C.